SONIX

600+ SUMMER TYRES SIZES

400+ WINTER TYRES SIZES

130+ ALL SEASON TYRES SIZES

GLOBAL TIRES INTERNATIONAL
UNITED STATES: 621 NW 53rd Street, Suite 125 Boca Raton Florida 33487 Tel: +1 5619332753
Gtiresinternational.us

SONIX



SONIX

PCR CATALOGUE



INTRODUCTION:

SONIX Brand launched by UNIPOWER TYRE GROUP, specialized in manufacturing car tyres and truck bus tyres for 10 years. Sonix believes in delivering great quality tires at fair prices and keeps improving the brand strengths.

- Engineering: Global engineering team, Recruit from premium brand and top universities
- Production: State-of-the-Art manufacturing
- Quality approved by global different tyres standards: CCC,DOT,ECE,SMARK,GCC,SGS,etc
- Product Advantages: wide size range
  (HP,UHP,VAN,LT, H/T, A/T, M/T,R/T for summer, winter and all season tyres)
  Unique Patterns and new sizes invested in each year, Joint product development with partners,etc
- Marketing Support: Free promotion gifts, Trade Shows,local activities for building the brand,etc
- Warranty: fast claim process within 3 years

PROMOTIONAL SUPPORT:



CONTENTS

Manufacturer 01
Pattern Selection Guide 03
HP 05
UHP 11
H/T 21
A/T 27
R/T 33
M/T 37
VAN LT 43
ALL SEASON 55
WINTER 61
Certificates 81

Pattern Selection Guide

















SONIX



HOT





ECOPRO 99

PRIMESTAR 66

HOT


ECOPRO 99



PCR | UHP | SUV | 4X4/LT | VAN

Economical | Silence | Wet | Stability

Performance test:



M+S

RIM SIZE	12 - 16
SERIES	50 - 80
SPEED RATING	T - W



Four wide circumferential grooves
Enhance handling stability while providing water evacuation.The refined grooves design provides excellent radiation, noise reduction and high performance.

Asymmetric pattern design
Enhances traction and brake balance and provide noise reduction.

Shoulder slotting
Helps disperse water and provides water resistance and comfort.

Asymmetric pattern Design
Enhances traction and brake balance and also provides noise reduction.

HP

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
12'	145/70R12	69T	-	6.6	4.50B	150	509	325	716	300/44	400AA	B	D	C	68	B
	155/70R12	73T	-	6.6	4.50B	157	523	365	805	300/44	400AA	B	D	C	68	B
13'	155/65R13	73T	-	6.6	4.50B	157	532	365	805	300/44	400AA	B	D	C	68	B
	155/70R13	75T	-	6.6	4.50B	157	548	387	853	300/44	400AA	B	D	C	68	B
	155/80R13	79T	-	6.6	4.50B	157	578	437	963	300/44	400AA	B	C	C	68	B
	165/65R13	77T	-	6.8	5.00B	170	544	412	908	300/44	400AA	B	C	C	68	B
	165/70R13	79T	-	6.8	5.00B	170	562	437	963	300/44	400AA	B	C	C	68	B
	175/70R13	82T	-	7	5.00B	177	576	475	1047	300/44	400AA	B	C	C	68	B
14'	155/65R14	75T	-	6.6	4.50B	157	558	387	853	300/44	400AA	B	C	C	68	B
	165/60R14	75H	-	6.8	5.00B	170	554	387	853	300/44	400AA	B	C	C	68	B
	165/65R14	79T	-	6.8	5.00B	170	570	437	963	300/44	400AA	B	C	C	68	B
	165/70R14	85TXL	-	6.8	5.00B	170	588	515	1135	340/50	400AA	B	C	C	68	A
	165/70R14	81T	-	6.8	5.00B	170	588	462	1019	300/44	400AA	B	C	C	68	B
	175/60R14	79H	-	7	5.00B	177	566	437	963	300/44	400AA	B	C	C	68	B
	175/65R14	86TXL	-	7	5.00B	177	584	530	1168	340/50	400AA	B	C	C	68	A
	175/65R14	82H	-	7	5.00B	177	584	475	1047	300/44	400AA	B	C	C	68	B
	175/70R14	88TXL	-	7	5.00B	177	602	560	1235	340/50	400AA	B	C	C	68	A
	175/70R14	84T	-	7	5.00B	177	602	500	1102	300/44	400AA	B	C	C	68	B
	185/50R14	77V	-	7	6J	194	542	412	908	300/44	400AA	B	C	C	68	B
	185/55R14	80H	-	7	6J	194	560	450	992	300/44	400AA	B	C	C	68	B
	185/60R14	82H	-	7	5 1/2J	189	578	475	1047	300/44	400AA	B	C	C	68	B
	185/65R14	86H	-	7	5 1/2J	189	596	530	1168	300/44	400AA	B	C	C	68	B
	185/70R14	88T	-	7.2	5 1/2J	189	616	560	1235	300/44	400AA	B	C	C	68	B
	195/65R14	89H	-	7	6J	201	610	580	1279	300/44	400AA	B	C	C	68	A
15'	155/60R15	74T	-	7.2	4.50B	157	567	375	827	300/44	400AA	B	C	C	68	B
	165/60R15	81HXL	-	6.6	5.00B	170	579	462	1019	340/50	400AA	B	C	C	68	A
	165/65R15	81H	-	6.8	5J	170	595	462	1019	300/44	400AA	B	C	C	68	B
	175/55R15	77H	-	6.8	5 1/2J	182	573	412	908	300/44	400AA	B	C	C	68	B
	175/60R15	81H	-	7	5J	177	591	462	1019	300/44	400AA	B	C	C	68	B
	175/65R15	84H	-	7	5J	177	609	500	1102	300/44	400AA	B	C	C	68	B
	185/55R15	82V	-	7	6J	194	585	475	1047	300/44	400AA	B	C	C	68	B
	185/60R15	88HXL	-	7	5 1/2J	189	603	560	1235	340/50	400AA	B	C	C	68	A
	185/60R15	84H	-	7	5 1/2J	189	603	500	1102	300/44	400AA	B	C	C	68	B
	185/65R15	92TXL	-	7	5 1/2J	189	621	630	1389	340/50	400AA	B	C	C	68	A
	185/65R15	88H	-	7	5 1/2J	189	621	560	1235	300/44	400AA	B	C	C	68	B
	195/50R15	82V	-	7.2	6J	201	577	475	1047	300/44	400AA	B	C	C	68	A
	195/55R15	85V	-	7.2	6J	201	595	515	1135	300/44	400AA	B	C	C	68	A
	195/60R15	88V	-	7.2	6J	201	615	560	1235	300/44	400AA	B	C	C	68	A
	195/60R15	88H	-	7.2	6J	201	615	560	1235	300/44	400AA	B	C	C	68	A
	195/65R15	95TXL	-	7.2	6J	201	635	690	1521	340/50	400AA	B	C	C	68	A
	195/65R15	91V	-	7.2	6J	201	635	615	1356	300/44	400AA	B	C	C	68	A
	205/60R15	91V	-	7.2	6J	209	627	615	1356	300/44	400AA	B	C	C	68	A
	205/65R15	94V	-	7.2	6J	209	647	670	1477	300/44	400AA	B	C	C	68	A
	215/65R15	96H	-	7.6	6 1/2J	221	661	710	1565	300/44	400AA	B	C	C	68	A
16'	175/50R16	77V	-	7	5 1/2J	182	582	412	908	300/44	400AA	B	C	C	68	B
	185/50R16	81V	-	7	6J	194	592	462	1019	300/44	400AA	B	C	C	68	B
	185/55R16	87VXL	-	7	6J	194	610	545	1202	340/50	400AA	B	C	C	68	A
	185/55R16	83H	-	7	6J	194	610	487	1074	300/44	400AA	B	C	C	68	B
	195/50R16	88VXL	-	7.2	6J	201	602	560	1235	340/50	400AA	B	C	C	68	A
	195/55R16	91VXL	-	7.2	6J	201	620	615	1356	340/50	400AA	B	C	C	68	A
	205/50R16	91WXL	-	7.2	6 1/2J	214	612	615	1356	340/50	400AA	B	C	C	68	A
	205/50R16	87W	-	7.2	6 1/2J	214	612	545	1202	300/44	400AA	B	C	C	68	A
	205/55R16	94WXL	-	7.2	6 1/2J	214	632	670	1477	340/50	400AA	B	C	C	68	A
	205/55R16	91V	-	7.2	6 1/2J	214	632	615	1356	300/44	400AA	B	C	C	68	A
	205/60R16	96VXL	-	7.2	6J	209	652	710	1565	340/50	400AA	B	C	C	68	A
	205/60R16	92V	-	7.2	6J	209	652	630	1389	300/44	400AA	B	C	C	68	A
	215/55R16	97WXL	-	7.5	7J	226	642	730	1609	340/50	400AA	B	C	C	68	A
	215/60R16	99HXL	-	7.5	6 1/2J	221	664	775	1709	340/50	400AA	B	C	C	68	A
	215/60R16	95V	-	7.5	6 1/2J	221	664	690	1521	300/44	400AA	B	C	C	68	A
	215/65R16	102HXL	-	7.5	6 1/2J	221	686	850	1874	340/50	400AA	B	C	C	68	A
	215/65R16	98H	-	7.5	6 1/2J	221	686	750	1653	300/44	400AA	B	C	C	68	A
	225/55R16	99WXL	-	7.5	7J	233	654	775	1709	340/50	400AA	B	C	C	68	A
	225/60R16	102VXL	-	7.5	6 1/2J	228	676	850	1874	340/50	400AA	B	C	C	68	A
	225/60R16	98H	-	7.5	6 1/2J	228	676	750	1653	300/44	400AA	B	C	C	68	A

SONIX



UHP



L-ZEAL 56



PRIME UHP 08



L-ZEAL 56 (RUN-FLAT)


L-ZEAL 56



PCR | UHP | SUV | 4X4/LT | VAN

Comfort | High performance | Drainage | Silence

Performance test:



M+S

RIM SIZE	15 - 24
SERIES	25 - 60
SPEED RATING	V - Y



Wide and large shoulder blocks
with sipe design ensure the blocks peristalsis slightly while turing corner and changing lanes, bring stable handling and greet driving performance.

Linked pattern design
reduces the driving noise and provide great wetland grip performance.

Asymmetric tread pattern
design with lateral grooves linked inside provide excellent drainage performance.

Vertical ribs
improves high-speed driving stability.

UHP

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
15'	195/45R15	82VXL	-	7.2	6 1/2J	195	557	475	1047	340/50	300/A/A	B	D	B	69	A
16'	195/50R16	84V	-	8	6J	201	602	500	1102	300/44	300/A/A	B	D	B	69	B
17'	195/40R17	81W	-	6.5	7J	200	588	462	1019	340/50	300/A/A	B	D	B	69	A
	215/50ZR18	92W	-	7.5	7J	226	673	630	1389	300/44	300/A/A	B	C	B	70	B
	225/50ZR18	99WXL	-	7.5	7J	233	683	775	1709	340/50	300/A/A	B	C	B	70	B
18'	255/50R18	106VXL	-	7.5	8J	265	713	950	2094	340/50	300/A/A	B	C	B	71	B
	265/40ZR18	101WXL	-	7.5	9 1/2J	271	669	825	1819	340/50	300/A/A	B	C	B	72	B
	275/40ZR18	103WXL	-	7.5	9 1/2J	278	677	875	1929	340/50	300/A/A	B	C	B	72	B
	285/35ZR18	101W	-	8	10J	290	657	825	1819	340/50	300/A/A	B	C	B	73	B
	205/55R19	97VXL	-	7.5	6 1/2J	214	709	730	1609	340/50	300/A/A	B	D	B	70	B
	225/40ZR19	93WXL	-	7.5	8J	230	663	650	1433	340/50	300/A/A	B	C	B	70	B
	225/55R19	99V	-	8	7J	233	731	775	1709	300/44	300/A/A	B	C	B	71	B
	255/55R19	111VXL	-	7.5	8J	265	763	1090	2403	340/50	300/A/A	B	C	B	71	B
19'	265/30ZR19	93W	-	8	9 1/2J	271	643	650	1433	340/50	300/A/A	B	C	B	72	B
	265/50R19	110VXL	-	7.5	8 1/2J	277	749	1060	2337	340/50	300/A/A	B	C	B	72	B
	275/30ZR19	96W	-	8	9 1/2J	278	649	710	1565	340/50	300/A/A	B	C	B	72	B
	275/45R19	108VXL	-	7.5	9J	273	731	1000	2205	340/50	300/A/A	B	C	B	72	B
	275/55R19	111V	-	7.5	8 1/2J	284	785	1090	2403	300/44	300/A/A	B	C	B	72	B
	195/55R20	91V	-	7.5	6J	201	722	615	1356	300/44	300/A/A	B	D	B	70	B
	225/30ZR20	85W	-	8	8J	230	644	515	1135	340/50	300/A/A	B	C	B	71	B
	235/30ZR20	88WXL	-	7.5	8 1/2J	241	650	560	1235	340/50	300/A/A	B	C	B	70	B
	235/35R20	92W	-	8	8 1/2J	241	672	630	1389	340/50	300/A/A	B	C	B	70	B
	235/55ZR20	105WXL	-	7.5	7 1/2J	245	766	925	2039	340/50	300/A/A	B	C	B	70	B
	245/30ZR20	95WXL	-	7.5	8 1/2J	248	656	690	1521	340/50	300/A/A	B	C	B	70	B
	245/35R20	95W	-	8	8 1/2J	248	680	690	1521	340/50	300/A/A	B	C	B	70	B
	245/40ZR20	99W	-	8	8 1/2J	248	704	775	1709	340/50	300/A/A	B	C	B	71	B
	245/45ZR20	103WXL	-	7.5	8J	243	728	875	1929	340/50	300/A/A	B	C	B	71	B
	245/50ZR20	105WXL	-	7.5	7 1/2J	253	754	925	2039	340/50	300/A/A	B	C	B	71	B
	255/30ZR20	92YXL	-	7.5	9J	260	662	630	1389	340/50	300/A/A	B	C	B	72	B
	255/45ZR20	105WXL	-	7.5	8 1/2J	255	738	925	2039	340/50	300/A/A	B	C	B	71	B
20'	255/50R20	109VXL	-	7.5	8J	265	764	1030	2271	340/50	300/A/A	B	C	B	71	B
	265/45ZR20	108WXL	-	7.5	9J	266	746	1000	2205	340/50	300/A/A	B	C	B	71	B
	265/50R20	111VXL	-	7.5	8 1/2J	277	774	1090	2403	340/50	300/A/A	B	C	B	72	B
	275/30R20	97WXL	-	8	9 1/2J	278	674	730	1609	340/50	300/A/A	B	C	B	72	B
	275/35ZR20	102W	-	8	9 1/2J	278	700	850	1874	340/50	300/A/A	B	C	B	72	B
	275/40ZR20	106WXL	-	7.5	9 1/2J	278	728	950	2094	340/50	300/A/A	B	C	B	72	B
	275/45R20	110VXL	-	7.5	9J	273	756	1060	2337	340/50	300/A/A	B	C	B	72	B
	275/50R20	113VXL	-	7.5	8 1/2J	284	784	1150	2535	340/50	300/A/A	B	C	B	72	B
	275/55R20	117VXL	-	7.5	8 1/2J	284	810	1285	2833	340/50	300/A/A	B	C	B	72	B
	275/60R20	119HXL	-	7.5	8J	279	838	1360	2998	340/50	300/A/A	B	C	B	72	B
	285/30ZR20	99W	-	8	10J	290	680	775	1709	340/50	300/A/A	B	C	B	73	B
	285/50R20	116VXL	-	7.5	9J	297	794	1250	2756	340/50	300/A/A	B	C	B	73	B
	305/35R20	107VXL	-	7.5	11J	313	722	975	2149	340/50	300/A/A	B	C	B	74	B
	305/40R20	112VXL	-	7.5	11J	313	752	1120	2469	340/50	300/A/A	B	C	B	73	B
	245/35ZR21	96WXL	-	7.5	8 1/2J	248	705	710	1565	340/50	300/A/A	B	C	B	71	B
	275/30ZR21	98WXL	-	7.5	9 1/2J	278	699	750	1653	340/50	300/A/A	B	C	B	72	B
21'	275/40ZR21	107WXL	-	7.5	9 1/2J	278	753	975	2149	340/50	300/A/A	B	C	B	72	B
	275/50R21	113VXL	-	7.5	8 1/2J	284	809	1150	2535	340/50	300/A/A	B	C	B	72	B
	315/35ZR21	111WXL	-	7.5	11J	320	753	1090	2403	340/50	300/A/A	B	C	B	73	B
	315/40R21	115VXL	-	7.5	11J	320	785	1215	2679	340/50	300/A/A	B	C	B	73	B
	235/30R22	90WXL	-	8	8 1/2J	242	701	600	1323	340/50	300/A/A	B	C	B	71	B
	245/30R22	92WXL	-	8	8 1/2J	248	707	630	1389	340/50	300/A/A	B	C	B	71	B
	255/30R22	95WXL	-	8	9J	260	713	690	1521	340/50	300/A/A	B	C	B	71	B
22'	265/30ZR22	97W	-	8	9 1/2J	271	719	730	1609	340/50	300/A/A	B	C	B	72	B
	265/45ZR22	110WXL	-	7.5	9J	266	797	1060	2337	340/50	300/A/A	B	C	B	71	B
	285/50R22	118VXL	-	7.5	9J	297	845	1320	2910	340/50	300/A/A	B	C	B	73	B
	295/25ZR22	97W	-	8	10 1/2J	301	707	730	1609	340/50	300/A/A	B	C	B	73	B
	295/40R22	112VXL	-	7.5	10 1/2J	301	795	1120	2469	340/50	300/A/A	B	C	B	73	B
24'	255/30ZR24	97W	-	8	9J	260	764	730	1609	340/50	300/A/A	B	C	B	72	B


PRIME UHP 08



PCR | UHP | SUV | 4X4/LT | VAN

Comfort | High performance | Drainage | Silence

Performance test:



M+S

RIM SIZE	16 - 21
SERIES	30 - 55
SPEED RATING	V - Y

Silicon-containing tread compound
New Silicon-containing tread compound enhance grip in wet road conditions and reduce rolling resistance.

Asymmetric tread pattern
Asymmetric tread pattern design and functionally differentiated in medial and lateral sidewall improve steering performance in wet road conditions, and ensure high-speed stability.



Anti-skip design
A mass of steel sheets and grooves design provide great grip ability and driving performance on wetland.


Low-noise design
Creative tread grooves' fine lines design effectively reduce noise at high-speed driving.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
	195/45R16	84V XL	-	7.5	6 1/2J	195	582	500	1102	340/50	400/A/A	B	D	C	69	A
	205/45R16	87W XL	-	8	7 J	206	590	545	1201	340/50	400/A/A	B	D	C	69	A
	205/50R16	91W XL	-	8	6 1/2J	214	612	615	1356	340/50	400/A/A	B	C	C	69	A
	205/55R16	94W XL	-	7.2	6 1/2J	214	632	670	1477	340/50	400/A/A	B	C	C	69	A
16'	215/40ZR16	86W XL	-	7.5	7 1/2J	218	578	530	1168	340/50	400/A/A	B	D	B	70	B
	215/45R16	90V XL	-	7.5	7J	213	600	600	1323	340/50	400/A/A	B	C	B	70	B
	215/55ZR16	97W XL	-	7.5	7J	226	642	730	1609	340/50	400/A/A	B	C	B	70	B
	225/50ZR16	96W XL	-	7.5	7J	233	632	710	1565	340/50	400/A/A	B	C	B	70	B
	225/55R16	99W XL	-	8	7 J	233	654	775	1709	340/50	400/A/A	B	C	B	70	B
	165/35R17	68VXL	-	7.2	6 J	170	547	315	694	340/50	400/A/A	B	-	-	-	-
	165/40R17	72V	-	7.2	6 J	170	564	355	783	340/50	400/A/A	B	D	C	69	B
	165/45R17	76VXL	-	7.2	5 1/2J	165	579	400	882	340/50	400/A/A	B	-	-	-	-
	185/35R17	82V	-	7.5	6 1/2J	183	562	475	1047	340/50	400/A/A	B	D	C	69	B
	185/40R17	78VXL	-	7.2	6 1/2J	188	580	425	937	340/50	400/A/A	B	-	-	-	-
	195/45ZR17	85W XL	-	7.5	6 1/2J	195	608	515	1135	340/50	400/A/A	B	D	C	69	A
	205/40R17	84W XL	-	8.2	7 1/2J	212	596	500	1102	340/50	400/A/A	B	D	C	69	A
	205/45R17	88W XL	-	8.2	7 J	206	616	560	1235	340/50	400/A/A	B	D	C	69	A
	205/50R17	93W XL	-	8	6 1/2J	214	638	650	1433	340/50	400/A/A	B	C	C	69	A
	205/55ZR17	95W XL	-	7.5	6 1/2J	214	658	690	1521	340/50	400/A/A	B	C	C	69	A
	215/40ZR17	87W XL	-	7.5	7 1/2J	218	604	545	1201	340/50	400/A/A	B	D	B	70	B
17'	215/45R17	91W XL	-	8	7 J	213	626	615	1356	340/50	400/A/A	B	C	B	70	B
	215/50R17	95W XL	-	8	7 J	226	648	690	1521	340/50	400/A/A	B	C	B	70	B
	215/55R17	98W XL	-	8	7 J	226	668	750	1653	340/50	400/A/A	B	C	B	70	B
	225/45R17	94W XL	-	8	7 1/2J	225	634	670	1477	340/50	400/A/A	B	C	B	70	B
	225/50R17	98W XL	-	8	7 J	233	658	750	1653	340/50	400/A/A	B	C	B	70	B
	225/55R17	101W XL	-	8	7 J	233	680	825	1819	340/50	400/A/A	B	C	B	70	B
	235/45R17	97W XL	-	8	8 J	236	644	730	1609	340/50	400/A/A	B	C	B	70	B
	235/50R17	100V	-	7.7	7 1/2J	245	668	800	1764	340/50	400/A/A	B	C	B	70	B
	235/55ZR17	103W	-	7.7	7 1/2J	245	690	875	1929	340/50	400/A/A	B	C	B	70	B
	245/40ZR17	95W XL	-	7.5	8 1/2J	248	628	690	1521	340/50	400/A/A	B	C	B	71	B
	245/45ZR17	99W	-	7.7	8 J	243	652	775	1709	340/50	400/A/A	B	C	B	71	B
	185/35R18	83V	-	7.5	6 1/2J	183	587	487	1074	340/50	400/A/A	B	D	C	69	B
	215/35ZR18	84W XL	-	7.5	7 1/2J	218	607	500	1102	340/50	400/A/A	B	D	B	70	B
	215/40ZR18	89W XL	-	7.5	7 1/2J	218	629	580	1279	340/50	400/A/A	B	D	B	70	B
	215/45ZR18	93W XL	-	7.5	7J	213	651	650	1433	340/50	400/A/A	B	C	B	70	B
	215/55R18	99V	-	7.7	7 J	226	693	775	1709	340/50	400/A/A	B	C	B	70	B
	225/40R18	92W XL	-	8	8 J	230	637	630	1389	340/50	400/A/A	B	C	B	70	B
	225/45R18	95W XL	-	8	7 1/2J	225	659	690	1521	340/50	400/A/A	B	C	B	70	B
	225/55R18	102V	-	7.7	7 J	233	705	850	1874	340/50	400/A/A	B	C	B	70	B
	235/40R18	95W XL	-	8	8 1/2J	241	645	690	1521	340/50	400/A/A	B	C	B	70	B
	235/45ZR18	98W XL	-	8	8 J	236	669	750	1653	340/50	400/A/A	B	C	B	70	B
18'	235/50R18	97V	-	7.5	7 1/2J	245	693	730	1609	300/44	400/A/A	B	C	B	70	B
	235/55R18	104V	-	7.7	7 1/2J	245	715	900	1984	340/50	400/A/A	B	C	B	70	B
	245/40R18	97W XL	-	8	8 1/2J	248	653	730	1609	340/50	400/A/A	B	C	B	71	B
	245/45R18	100W XL	-	8	8 J	243	677	800	1764	340/50	400/A/A	B	C	B	71	B
	245/50ZR18	104W	-	7.7	7 1/2J	253	703	900	1984	340/50	400/A/A	B	C	B	71	B
	255/35ZR18	94W XL	-	8	9J	260	635	670	1477	340/50	400/A/A	B	C	B	71	B
	255/40ZR18	99W XL	-	8	9J	260	661	775	1709	340/50	400/A/A	B	C	B	71	B
	255/45ZR18	103W	-	7.7	8 1/2J	255	687	875	1929	340/50	400/A/A	B	C	B	71	B
	255/55R18	109V	-	7.7	8 J	265	737	1030	2271	340/50	400/A/A	B	C	B	71	B
	265/35ZR18	97W XL	-	8	9 1/2J	271	643	730	1609	340/50	400/A/A	B	C	B	71	B
	275/35ZR18	99W XL	-	8	9 1/2J	278	649	775	1709	340/50	400/A/A	B	C	B	72	B
	215/35ZR19	85W XL	-	7.5	7 1/2J	218	633	515	1135	340/50	400/A/A	B	D	B	70	B
	225/35ZR19	88W XL	-	7.5	8J	230	641	560	1235	340/50	400/A/A	B	D	B	70	B
	225/45ZR19	96W XL	-	7.5	7 1/2J	225	685	710	1565	340/50	400/A/A	B	C	B	70	B
	225/55R19	99V	-	7.5	7J	233	731	775	1709	300/44	400/A/A	B	C	B	70	B
	235/35ZR19	91W XL	-	7.5	8 1/2J	241	647	615	1356	340/50	400/A/A	B	C	B	70	B
	235/40ZR19	96W	-	7.5	8 1/2J	241	671	710	1565	340/50	400/A/A	B	C	B	70	B
	235/45ZR19	99W XL	-	7.5	8J	236	695	775	1709	340/50	400/A/A	B	C	B	70	B
	235/50ZR19	103W XL	-	7.5	7 1/2J	245	719	875	1929	340/50	400/A/A	B	C	B	70	B
	235/55R19	105V XL	-	7.5	7 1/2J	245	741	925	2039	340/50	400/A/A	B	C	B	70	B
	245/35ZR19	93W XL	-	7.5	8 1/2J	248	655	650	1433	340/50	400/A/A	B	C	B	71	B
19'	245/40ZR19	98W XL	-	7.5	8 1/2J	248	679	750	1653	340/50	400/A/A	B	C	B	71	B
	245/45R19	102W XL	-	8.2	8 J	243	703	850	1874	340/50	400/A/A	B	C	B	71	B
	245/55R19	107V XL	-	7.5	7 1/2J	253	753	975	2149	340/50	400/A/A	B	C	B	71	B
	255/30ZR19	91Y XL	-	8	9J	260	637	615	1356	340/50	400/A/A	B	C	B	71	B
	255/35ZR19	96W XL	-	8	9J	260	661	710	1565	340/50	400/A/A	B	C	B	71	B
	255/40ZR19	100W XL	-	8	9J	260	687	800	1764	340/50	400/A/A	B	C	B	71	B
	255/45ZR19	104W XL	-	8	8 1/2J	255	713	900	1984	340/50	400/A/A	B	C	B	71	B
	255/50R19	107V XL	-	8	8J	265	739	975	2149	340/50	400/A/A	B	C	B	71	B
	275/30ZR19	96WXL	-	7.5	9 1/2J	278	649	710	1565	340/50	400/A/A	B	C	B	72	B
	275/35ZR19	100Y XL	-	8	9 1/2J	278	675	800	1764	340/50	400/A/A	B	C	B	72	B
	275/40ZR19	105W XL	-	8	9 1/2J	278	703	925	2039	340/50	400/A/A	B	C	B	72	B
	285/45R19	111V XL	-	8	9 1/2J	285	739	1090	2403	340/50	400/A/A	B	C	B	73	B
	205/35R20	84V	-	7.5	7 1/2J	212	652	500	1102	340/50	400/A/A	B	D	C	69	A
	225/35ZR20	90W	-	8	8 J	230	666	600	1323	340/50	400/A/A	B	C	B	70	B
	245/35ZR20	95WXL	-	7.5	8 1/2J	248	680	690	1521	340/50	400/A/A	B	C	B	70	B
20'	245/40ZR20	99WXL	-	7.5	8 1/2J	248	704	775	1709	340/50	400/A/A	B	C	B	70	B
	255/35ZR20	97W XL	-	8	9J	260	686	730	1609	340/50	400/A/A	B	C	B	71	B
	275/30ZR20	97WXL	-	7.5	9 1/2J	278	674	730	1609	340/50	400/A/A	B	C	B	72	B
	275/35ZR20	102WXL	-	7.5	9 1/2J	278	700	850	1874	340/50	400/A/A	B	C	B	72	B
	265/45ZR21	108W XL	-	8	9J	266	771	1000	2205	340/50	400/A/A	B	C	B	72	B
21'	275/45ZR21	110W XL	-	8	9J	273	781	1060	2337	340/50	400/A/A	B	C	B	72	B
	295/35ZR21	107W XL	-	8	10 1/2J	301	739	975	2149	340/50	400/A/A	B	C	B	73	B
	295/40ZR21	111W XL	-	8	10 1/2J	301	769	1090	2403	340/50	400/A/A	B	C	B	73	B

L-ZEAL 56 (RUN-FLAT)





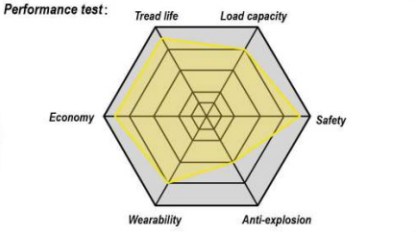

M+S

RIM SIZE	17 - 20
SERIES	30 - 55
SPEED RATING	V - W



Wide and large shoulder blocks
with sipe design ensure the blocks peristalsis slightly while turing corner and changing lanes, bring stable handling and greet driving performance.

Linked pattern design
reduces the driving noise and provide great wetland grip performance.

Asymmetric tread pattern
design with lateral grooves linked inside provide excellent drainage performance.

Vertical ribs
improves high-speed driving stability.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
17'	205/45ZRF17	88WXL	-	8	7J	206	616	560	1235	340/50	300/A/A	B	-	-	-	-
	205/50ZRF17	93WXL	-	8	6 1/2J	214	638	650	1433	340/50	300/A/A	B	-	-	-	-
	225/45ZRF17	94WXL	-	8	7 1/2J	225	634	670	1477	340/50	300/A/A	B	-	-	-	-
	225/50ZRF17	98WXL	-	8	7J	233	658	750	1653	340/50	300/A/A	B	-	-	-	-
	225/55RF17	97V	-	8	7J	233	680	730	1609	300/44	300/A/A	B	-	-	-	-
	235/55RF17	99V	-	8	7 1/2J	245	690	775	1709	300/44	300/A/A	B	-	-	-	-
	245/40ZRF17	95WXL	-	8	8 1/2J	248	628	690	1521	340/50	300/A/A	B	-	-	-	-
	245/45ZRF17	99WXL	-	8	8 J	243	652	775	1709	340/50	300/A/A	B	-	-	-	-
18'	215/55ZRF18	99WXL	-	8	7J	226	693	775	1709	340/50	300/A/A	B	-	-	-	-
	225/40ZRF18	92WXL	-	8	8 J	230	637	630	1389	340/50	300/A/A	B	-	-	-	-
	225/45ZRF18	95WXL	-	8	7 1/2J	225	659	690	1521	340/50	300/A/A	B	-	-	-	-
	235/50RF18	97V	-	8	7 1/2J	245	693	730	1609	300/44	300/A/A	B	-	-	-	-
	245/45ZRF18	100WXL	-	8	8 J	243	677	800	1764	340/50	300/A/A	B	-	-	-	-
	255/40ZRF18	99WXL	-	7.5	9J	260	661	775	1709	340/50	300/A/A	B	-	-	-	-
	225/50ZRF18	99WXL	-	7.5	7J	233	683	775	1709	340/50	300/A/A	B	-	-	-	-
	255/45ZRF18	99W	-	8	8 1/2J	255	687	775	1709	300/44	300/A/A	B	-	-	-	-
	245/40ZRF18	97WXL	-	8	8 1/2J	248	653	730	1609	340/50	300/A/A	B	-	-	-	-
	255/35ZRF18	94WXL	-	8	9 J	260	635	670	1477	340/50	300/A/A	B	-	-	-	-
19'	245/40ZRF19	98WXL	-	7.5	8 1/2J	248	679	750	1653	340/50	300/A/A	B	-	-	-	-
	245/45ZRF19	98W	-	8	8J	243	703	750	1653	300/44	300/A/A	B	-	-	-	-
	225/35ZRF19	84W	-	8	8J	230	641	500	1102	300/44	300/A/A	B	-	-	-	-
	235/35ZRF19	91WXL	-	8	8 1/2J	241	647	615	1356	340/50	300/A/A	B	-	-	-	-
	235/45ZRF19	95W	-	8	8J	236	695	690	1521	300/44	300/A/A	B	-	-	-	-
	235/50ZRF19	103VXL	-	8	7 1/2J	245	719	875	1929	340/50	300/A/A	B	-	-	-	-
	245/35ZRF19	93WXL	-	8	8 1/2J	248	655	650	1433	340/50	300/A/A	B	-	-	-	-
	225/40ZRF19	93WXL	-	7.5	8J	230	663	650	1433	340/50	300/A/A	B	-	-	-	-
	255/35ZRF19	96WXL	-	8	9J	260	661	710	1565	340/50	300/A/A	B	-	-	-	-
	255/45ZRF19	100W	-	8	8 1/2J	255	713	800	1764	300/44	300/A/A	B	-	-	-	-
20'	245/40ZRF20	99WXL	-	8	8 1/2J	248	704	775	1709	340/50	300/A/A	B	-	-	-	-
	275/35ZRF20	102WXL	-	8	9 1/2J	278	700	850	1874	340/50	300/A/A	B	-	-	-	-
	245/45ZRF20	103WXL	-	7.5	8J	243	728	875	1929	340/50	300/A/A	B	-	-	-	-
	275/40ZRF20	106WXL	-	7.5	9 1/2J	278	728	950	2094	340/50	300/A/A	B	-	-	-	-
	245/35ZRF20	95WXL	-	8	8 1/2J	248	680	690	1521	340/50	300/A/A	B	-	-	-	-
	275/30ZRF20	97WXL	-	8	9 1/2J	278	674	730	1609	340/50	300/A/A	B	-	-	-	-

SONIX





PRIMEMARCH H/T 79



PRIMEMARCH H/T 77


PRIMEMARCH H/T 79



PCR | UHP | SUV | 4X4/LT | VAN

Economical | Silence | Wet | Stability

Performance test:



M+S

RIM SIZE	16 - 20
SERIES	50 - 70
SPEED RATING	T - V



Four wide vertical drainage grooves
Offer necessary high-speed performance of SUV and cross country vehicle, provide great wetland draigage, and improve steering and handling ability on wet surface.

Directional rib in the center of crown with particularly
Designed lateral grooves and multiple sipes offer balanced block rigidity, provide excellent drainage performance, ensure good handling performance in rain and snow.

Continuously closed design on the tire shoulder and supported by the longitudinal vertical grooves
Reduce the rigidity of tire shoulder and restrain the eccentric wear effectively. Block noise spread of central pattern, reduce the noise and bring extraordinary driving comfort.

Restrain the eccentric wear rib design on tire shoulder
Stabilize tire shoulder contour, reduce eccentric wear of tire shoulder, and improves the handling stability when turning at high speed.

SONIX

H/T

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
16'	215/65R16	98H	-	8.5	6 1/2J	221	686	750	1653	300/44	420/A/A	B	C	C	69	B
	215/70R16	100H	-	8.5	6 1/2J	221	708	800	1764	300/44	420/A/A	B	C	C	69	B
	225/70R16	107HXL	-	8.5	6 1/2J	228	722	975	2149	340/50	420/A/A	B	C	C	70	B
	235/60R16	100H	-	8.5	7J	240	688	800	1764	300/44	420/A/A	B	C	C	69	B
	235/70R16	106H	-	8.5	7J	240	736	950	2094	300/44	420/A/A	B	C	C	69	B
	245/70R16	107H	-	8.5	7J	248	750	975	2149	300/44	420/A/A	B	C	C	69	B
	245/70R16	111HXL	-	8.5	7J	248	750	1090	2403	340/50	420/A/A	B	C	C	70	B
	255/65R16	109H	-	8.5	7 1/2J	260	738	1030	2271	300/44	420/A/A	B	C	C	70	B
	255/70R16	111T	-	8.8	7 1/2J	260	764	1090	2403	300/44	420/A/A	B	C	C	70	B
	265/70R16	112T	-	8.8	8J	272	778	1120	2469	300/44	420/A/A	B	C	C	70	B
	275/70R16	114T	-	8.8	8J	279	792	1180	2601	300/44	420/A/A	B	C	C	70	B
17'	215/60R17	96H	-	8.5	6 1/2J	221	690	710	1565	300/44	420/A/A	B	C	C	69	B
	215/65R17	99V	-	8.5	6 1/2J	221	712	775	1709	300/44	420/A/A	B	C	C	69	B
	225/60R17	99H	-	8.5	6 1/2J	228	702	775	1709	300/44	420/A/A	B	C	C	69	B
	235/60R17	102H	-	8.5	7J	240	714	850	1874	300/44	420/A/A	B	C	C	69	B
	235/60R17	106HXL	-	8.5	7J	240	714	950	2094	340/50	420/A/A	B	C	C	70	B
	225/65R17	102H	-	8.5	6 1/2J	228	724	850	1874	300/44	420/A/A	B	C	C	69	B
	235/65R17	104H	-	8.5	7J	240	738	900	1984	300/44	420/A/A	B	C	C	69	B
	245/65R17	111HXL	-	8.5	7J	248	750	1090	2403	340/50	420/A/A	B	C	C	70	B
	245/70R17	114TXL	-	8.5	7J	248	776	1180	2601	340/50	420/A/A	B	C	C	70	B
	255/60R17	110HXL	-	8.8	7 1/2J	260	738	1060	2337	340/50	420/A/A	B	C	C	70	A
	255/65R17	110H	-	8.5	7 1/2J	260	764	1060	2337	300/44	420/A/A	B	C	C	70	B
	265/65R17	112H	-	8.8	8J	272	776	1120	2469	300/44	420/A/A	B	C	C	70	B
	265/70R17	115T	-	8.8	8J	272	804	1215	2679	300/44	420/A/A	B	C	C	70	B
	275/65R17	115T	-	8.8	8J	279	790	1215	2679	300/44	420/A/A	B	C	C	70	B
	285/65R17	116T	-	8.8	8 1/2J	292	802	1250	2756	300/44	420/A/A	B	C	C	71	A
18'	225/55R18	98H	-	8.5	7J	233	705	750	1653	300/44	420/A/A	B	C	C	69	B
	235/55R18	104HXL	-	8.5	7 1/2J	245	715	900	1984	340/50	420/A/A	B	C	C	70	B
	225/60R18	104HXL	-	8.5	6 1/2J	228	727	900	1984	340/50	420/A/A	B	C	C	70	B
	235/60R18	107HXL	-	8.5	7J	240	739	975	2149	340/50	420/A/A	B	C	C	70	B
	235/65R18	110HXL	-	8.5	7J	240	763	1060	2337	340/50	420/A/A	B	C	C	70	B
	245/60R18	105H	-	8.5	7J	248	751	925	2039	300/44	420/A/A	B	C	C	69	B
	255/60R18	112HXL	-	8.8	7 1/2J	260	763	1120	2469	340/50	420/A/A	B	C	C	70	A
	255/70R18	113T	-	8.8	7 1/2J	260	815	1150	2535	300/44	420/A/A	B	C	C	70	B
	265/60R18	110H	-	8.8	8J	272	775	1060	2337	300/44	420/A/A	B	C	C	70	B
	265/70R18	116T	-	8.8	8J	272	829	1250	2756	300/44	420/A/A	B	C	C	70	B
	275/60R18	117HXL	-	8.8	8J	279	787	1285	2833	340/50	420/A/A	B	C	C	70	B
	285/60R18	116H	-	8.8	8 1/2J	292	799	1250	2756	300/44	420/A/A	B	C	C	71	A
19'	235/65R19	109HXL	-	8.5	7	240	789	1030	2271	340/50	420/A/A	B	C	C	70	B
	245/55R19	107VXL	-	8.5	7 1/2J	253	753	975	2149	340/50	420/A/A	B	C	C	70	B
	255/50R19	107VXL	-	8.8	8J	265	739	975	2149	340/50	420/A/A	B	C	C	70	A
	255/55R19	111VXL	-	8.8	8J	265	763	1090	2403	340/50	420/A/A	B	C	C	70	A
20'	285/50R20	116VXL	-	8.8	9J	297	794	1250	2756	340/50	420/A/A	B	C	C	73	B


PRIMEMARCH H/T 77



PCR | UHP | SUV | 4X4/LT | VAN

Economical | Silence | Wet | Stability

Performance test:



M+S

RIM SIZE	15 - 19
SERIES	55 - 75
SPEED RATING	T - V



Silence
Silence design 5 pitches design with best pattern permu-tation effectively reduce noise and show extremely silence.

All season tread design
All season tread design superior compre-hensive performance.

Coordinated tread pattern
Ribs pattern in central tread and coordinat-ed tread blocks on both sides ensure excellent steering and handling perfor-mance.

High density grooves
High density grooves design. Pattern with a mass of grooves increase the contact area with road surface, enhance the drainage and wetland grip ability. Shorten the wetland braking distance.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
15'	215/75R15	100H	-	8.7	6J	216	703	800	1763	300/44	460/A/A	B	C	C	71	B
	225/75R15	102H	-	8.7	6J	223	719	850	1873	300/44	460/A/A	B	C	C	71	B
	235/75R15	105H	-	9.3	6 1/2J	235	733	925	2039	300/44	460/A/A	B	C	C	71	B
	265/70R15	112T	-	9.3	8J	272	753	1120	2469	300/44	460/A/A	B	C	B	72	B
16'	215/65R16	102H	-	8.7	6 1/2J	221	686	850	1873	340/50	460/A/A	B	C	C	71	B
	215/70R16	100H	-	8.7	6 1/2J	221	708	800	1763	300/44	460/A/A	B	C	C	71	B
	225/70R16	103H	-	9.3	6 1/2J	228	722	875	1929	300/44	460/A/A	B	C	C	71	B
	225/75R16	104T	-	8.7	6J	223	744	900	1984	300/44	460/A/A	B	C	C	71	B
	235/60R16	100H	-	9.3	7J	240	688	800	1763	300/44	460/A/A	B	C	C	71	B
	235/70R16	106H	-	9.3	7J	240	736	950	2094	300/44	460/A/A	B	C	C	71	B
	245/70R16	111H	-	9.3	7J	248	750	1090	2403	340/50	460/A/A	B	C	B	71	B
	255/70R16	111H	-	9.3	7 1/2J	260	764	1090	2403	300/44	460/A/A	B	C	B	72	B
	265/70R16	112T	-	9.3	8J	272	778	1120	2469	300/44	460/A/A	B	C	B	72	B
	265/75R16	116T	-	9.3	7 1/2J	267	804	1250	2755	300/44	460/A/A	B	C	B	72	B
17'	215/60R17	100H	-	8.7	6 1/2J	221	690	800	1763	340/50	460/A/A	B	C	C	71	B
	215/65R17	99V	-	8.7	6 1/2J	221	712	775	1708	300/44	460/A/A	B	C	C	71	B
	235/60R17	102H	-	9.3	7J	240	714	850	1873	300/44	460/A/A	B	C	C	71	B
	235/65R17	108H	-	9.3	7J	240	738	1000	2204	340/50	460/A/A	B	C	C	71	B
	235/70R17	107H	-	9.3	7J	240	762	975	2149	300/44	460/A/A	B	C	C	71	B
	245/65R17	111H	-	9.3	7J	248	750	1090	2403	340/50	460/A/A	B	C	B	71	B
	265/65R17	112H	-	9.3	8J	272	776	1120	2469	300/44	460/A/A	B	C	B	72	B
	265/70R17	115H	-	9.3	8J	272	804	1215	2678	300/44	460/A/A	B	C	B	72	B
18'	235/60R18	107H	-	9.3	7J	240	739	975	2149	340/50	460/A/A	B	C	C	71	B
	245/60R18	105H	-	9.3	7J	248	751	925	2039	300/44	460/A/A	B	C	B	71	B
	255/60R18	112H	-	9.3	7 1/2J	260	763	1120	2469	340/50	460/A/A	B	C	B	72	B
	265/60R18	114H	-	9.3	8J	272	775	1180	2601	340/50	460/A/A	B	C	B	72	B
	275/65R18	116H	-	9.3	8J	279	815	1250	2755	300/44	460/A/A	B	C	B	72	B
19'	255/55R19	111V	-	9.3	8J	265	763	1090	2403	340/50	460/A/A	B	C	B	72	B

H/T

SONIX



A/T



White Letter

PRIMEMAX A/T II

White Letter


PRIMEMAX A/T II



PCR | UHP | SUV | 4X4/LT | VAN

4 season | Drainage | Silence | Braking

Performance test:



M+S

RIM SIZE	13 - 20
SERIES	50 - 85
SPEED RATING	Q - T



All-terrain design
All-terrain four season tire pattern, more strengthful tread block design.

Stone ejection design
Open tread pattern design effectively prevents stone retention, strengthen stone ejection performance.

Zigzag steel sheets
Small zigzag "3D steel sheet" design effectively deliver grips on wet road conditions, enhance driving traction.

Abrasion resistance formula
Special tread glue formula delivers a longer life.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
13'	175/75R13	84T	-	7.8	5.00B	177	593	500	1102	300/44	400AA	B	-	-	-	-
14'	175/75R14	86T	-	7.8	5J	177	618	530	1168	300/44	400AA	B	-	-	-	-
	205/60R15	91H	-	8	6J	209	627	615	1356	300/44	400AA	B	-	-	-	-
	205/65R15	94H	-	8	6J	209	647	670	1477	300/44	400AA	B	-	-	-	-
	205/70R15	96H	-	8	6J	209	669	710	1565	300/44	400AA	B/W	-	-	-	-
	215R15C	112/110S	8PR	8.5	6J	218	725	1120/1060	2469/2337	450/65	-	B	D	B	72	B
15'	LT215/75R15	100/97Q	6PR	11	6J	216	703	800/730	1765/1610	350/50	-	W	D	B	72	B
	LT235/75R15	104/101S	6PR	11	6 1/2J	235	733	900/825	1985/1820	350/50	-	W	D	B	72	B
	245/75R15C	109/107S	6PR	10.5	7J	248	749	1030/975	2271/2149	375/54	-	B	D	B	72	B
	255/70R15C	112/110S	6PR	8.5	7 1/2J	260	739	1120/1060	2469/2337	375/54	-	B	D	B	72	B
	31X10.50R15LT	109S	6PR	11	8 1/2J	268	775	1030	2270	350/50	-	W	D	B	72	B
	205/60R16	92H	-	8	6J	209	652	630	1389	300/44	400AA	B	-	-	-	-
	215/65R16	98T	-	9	6 1/2J	221	686	750	1653	300/44	400/A/A	B	D	C	71	B
	225/70R16	103T	-	9	6 1/2J	228	722	875	1929	300/44	400/A/A	B	D	C	71	B
	245/75R16	111T	-	8.8	7J	248	774	1090	2403	300/44	400/A/A	W	D	C	71	B
	255/70R16	111T	-	8.8	7 1/2J	260	764	1090	2403	300/44	400/A/A	W	D	C	72	B
	265/70R16	112T	-	10	8J	272	778	1120	2469	300/44	460/A/A	B	D	C	72	B
16'	185/75R16C	104/102R	8PR	8.5	5J	184	684	900/850	1984/1874	475/69	-	B	D	B	72	B
	205R16C	110/108S	8PR	8.5	6J	208	736	1060/1000	2337/2205	450/65	-	W	D	B	72	B
	LT215/85R16	115/112Q	10PR	10.5	6J	216	772	1215/1120	2679/2469	575/84	-	W	D	B	72	B
	LT245/70R16	113/110S	8PR	11	7J	248	750	1150/1060	2535/2335	450/65	-	W	D	B	72	B
	LT265/70R16	121/118S	10PR	11.5	8J	272	778	1450/1320	3195/2910	550/80	-	W	D	B	72	B
	LT265/75R16	123/120Q	10PR	12.5	7 1/2J	267	804	1550/1400	3415/3085	550/80	-	B	-	-	-	
	LT285/75R16	126/123Q	10PR	12.5	8J	286	834	1700/1550	3750/3415	550/80	-	B	-	-	-	
	215/65R17	99T	-	9	6 1/2J	221	712	775	1708	300/44	400/A/A	B	D	C	71	B
	225/60R17	99H	-	8.8	6 1/2J	228	702	775	1708	300/44	400/A/A	B	D	C	71	B
	265/65R17	112T	-	10	8J	272	776	1120	2469	300/44	460/A/A	B/W	D	C	72	B
	265/70R17	115S	-	10	8J	272	804	1215	2679	300/44	460/A/A	B	D	C	72	B
	275/65R17	115T	-	8.8	8J	279	790	1215	2679	300/44	400/A/A	W	D	C	72	B
17'	285/65R17	116T	-	8.8	8 1/2J	292	802	1250	2755	300/44	400/A/A	W	D	C	73	B
	LT245/65R17	111/108R	8PR	10.5	7J	248	750	1090/1000	2403/2205	450/65	-	W	D	B	72	B
	LT245/70R17	119/116S	10PR	11	7J	248	776	1360/1250	3000/2755	550/80	-	W	D	B	72	B
	LT245/75R17	121/118S	10PR	11	7J	248	800	1450/1320	3195/2910	550/80	-	W	D	B	72	B
	LT285/70R17	121/118Q	10PR	12.5	8 1/2J	292	832	1450/1320	3195/2910	550/80	-	B/W	D	B	72	B
	255/60R18	112T	-	10	7 1/2J	260	763	1120	2469	340/50	400/A/A	B	D	C	73	B
	265/60R18	110T	-	10	8J	272	775	1060	2336	300/44	400/A/A	B/W	D	C	72	B
	275/65R18	116T	-	10	8J	279	815	1250	2755	300/44	400/A/A	B	D	C	72	B
	285/60R18	120SXL	-	10	8 1/2J	292	799	1400	3086	340/50	460/A/A	B	D	C	73	B
18'	305/60R18	120S	-	10	9J	311	823	1400	3086	300/44	460/A/A	B	-	-	-	-
	LT285/60R18	122/119Q	10PR	12.5	8 1/2J	292	799	1500/1360	3305/3000	550/80	-	B	-	-	-	
	LT285/65R18	125/122R	10PR	11.5	8 1/2J	292	827	1650/1500	3640/3305	550/80	-	W	-	-	-	
	LT325/60R18	124/121Q	10PR	12.5	9 1/2J	331	847	1600/1450	3525/3195	450/65	-	B	-	-	-	
	LT325/65R18	127/124Q	10PR	12.5	9 1/2J	331	879	1750/1600	3860/3525	450/65	-	B	-	-	-	
	265/50R20	111SXL	-	10	8 1/2J	277	774	1090	2403	340/50	400/A/A	B/W	D	C	73	B
20'	275/55R20	117SXL	-	10	8 1/2J	284	810	1285	2833	340/50	400/A/A	B	D	C	73	B
	285/55R20	119SXL	-	10	9J	297	822	1360	2998	340/50	400/A/A	B	-	-	-	-
	305/50R20	120SXL	-	10	9 1/2J	316	814	1400	3086	340/50	400/A/A	B	-	-	-	-

A/T

SONIX



NEW



White Letter


PRIMEMASTER R/T


NEW

PRIMEMASTER R/T

White Letter





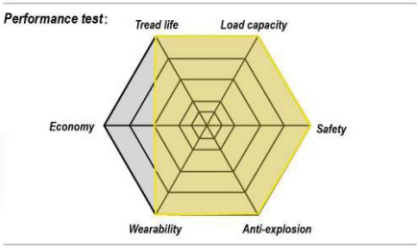

M+S

RIM SIZE	14 - 22
SERIES	50 - 75
SPEED RATING	Q



Different Under-shoulder pattern design
Protect the tire shoulder and upper sidewall from damage, improve the grip of the tire on muddy roads, and improve the grip under low adhesion conditions with low air pressure, different of two shoulder design to meet the needs of different users on the tire appearance.

Large shoulder matching small flower pattern block design in the middle
Ensure the off-road performance of tires, improve the comfort of pavement, and realize the perfect combination of off-road and road driving performance.

Staggered pattern shoulder design
The staggered shoulder shape is combined with stronger skeleton material to prevent the side rock from damaging the tire and improve the grip of the tire.

Composite pitch fit pitch random arrangement design
Improve tire grip and comfort, and reduce tire regular noise.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
14'	27X8.50R14LT	95Q	6PR	13.2	7J	218	674	690	-	350/50	-	W	-	-	-	-
	235/75R15	109Q	4PR	11.6	6 1/2J	235	733	1030	-	340/50	560/A/B	W	-	-	-	-
15'	31X10.50R15LT	109Q	6PR	13.2	8 1/2J	268	775	1030	-	350/50	-	W	-	-	-	-
	33X12.50R15LT	108Q	6PR	13.2	10J	318	826	1000	-	250/35	-	W	-	-	-	-
	235/70R16	109Q	4PR	11.6	7 J	240	736	1030	-	340/50	560/A/B	W	-	-	-	-
	255/70R16	111Q	4PR	11.6	7 1/2J	260	764	1090	-	300/44	560/A/B	W	-	-	-	-
	265/70R16	116Q	4PR	11.6	8J	272	778	1250	-	340/50	560/A/B	W	-	-	-	-
16'	LT245/75R16	120/116Q	10PR	12.2	7 J	248	774	1380/1260	-	550/80	-	W	-	-	-	-
	245/75R16	111Q	4PR	12.2	7 J	248	774	1090	-	300/44	560/A/B	W	-	-	-	-
	LT265/75R16	119/116Q	8PR	12.2	7 1/2J	267	804	1360/1250	-	450/65	-	W	-	-	-	-
	LT285/75R16	116/113Q	6PR	12.2	8 J	286	834	1250/1150	-	350/50	-	W	-	-	-	-
	265/65R17	116Q	4PR	11.6	8J	272	776	1250	-	340/50	560/A/B	W	-	-	-	-
	35X12.50R17LT	121Q	10PR	13.2	10J	318	877	1450	-	450/65	-	W	-	-	-	-
17'	LT265/70R17	118/115Q	8PR	12.2	8 J	272	804	1320/1215	-	450/65	-	W	-	-	-	-
	265/70R17	115Q	4PR	12.2	8 J	272	804	1215	-	300/44	560/A/B	W	-	-	-	-
	LT285/70R17	116/113Q	6PR	12.2	8 1/2J	292	832	1250/1150	-	350/50	-	W	-	-	-	-
	265/60R18	114Q	4PR	11.6	8J	272	775	1180	-	340/50	560/A/B	W	-	-	-	-
	265/65R18	116Q	4PR	11.6	8J	272	801	1250	-	340/50	560/A/B	W	-	-	-	-
18'	275/65R18	116Q	4PR	11.6	8J	279	815	1250	-	340/50	560/A/B	W	-	-	-	-
	33X12.50R18LT	118Q	10PR	13.2	10J	318	826	1320	-	450/65	-	W	-	-	-	-
	35X12.50R18LT	118Q	8PR	13.2	10J	318	877	1320	-	350/50	-	W	-	-	-	-
	LT285/65R18	121/118Q	8PR	12.2	8 1/2J	292	827	1450/1320	-	450/65	-	W	-	-	-	-
	265/50R20	111Q	4PR	11.6	8 1/2J	277	774	1090	-	340/50	560/A/B	W	-	-	-	-
	275/60R20	116Q	4PR	11.6	8J	279	838	1250	-	340/50	560/A/B	W	-	-	-	-
20'	33X12.50R20LT	114Q	10PR	13.2	10J	318	826	1180	-	450/65	-	W	-	-	-	-
	35X12.50R20LT	121Q	10PR	13.2	10J	318	877	1450	-	450/65	-	W	-	-	-	-
	LT285/55R20	117/114Q	8PR	12.2	9J	297	822	1285/1180	-	450/65	-	W	-	-	-	-
	285/45R22	114Q	4PR	11.6	9 1/2J	285	815	1180	-	340/50	560/A/B	W	-	-	-	-
22'	33X12.50R22LT	109Q	10PR	13.2	10J	318	826	1030	-	450/65	-	W	-	-	-	-
	35X12.50R22LT	117Q	10PR	13.2	10J	318	877	1285	-	450/65	-	W				

R/T



M/T



White Letter

PRIMEMASTER M/T II

SONIX

White Letter


PRIMEMASTER M/T II



PCR | UHP | SUV | 4X4/LT | VAN

Good Design | 4 season | Braking | Drainage

Performance test:



M+S

RIM SIZE	15 - 22
SERIES	70 - 85
SPEED RATING	Q



Widen and deepen the groove design to make the tire better in heat dissipation and better self-cleaning.

Unique bionic "shark" block design makes the product more puncture-resistant, cut-resistant, and guarantees driving stability. Very low land-to-sea ratio and strong grip, suitable for a variety of harsh and complicated road conditions.The reinforced structure of the two-layer steel belt and nylon full belt makes the tire tread effectively puncture-proof and makes the tire more durable.

The groove design of the sidewall pattern adopts the silt self-purification technology and the stone-repelling technology, which can automatically remove the silt accumulated in the trench and effectively prevent the stone from embedding, ensuring safe and smooth driving!

The thicker sidewall with the bionic unique pattern not only improves the impact resistance and damage of the tire, but also adds the rough and bold beauty of the tire.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
15'	LT235/75R15	104/101Q	6PR	13	6 1/2J	235	733	900/825	1985/1820	350/50	-	W	-	-	-	
	31X10.50R15LT	109Q	6PR	13.5	8 1/2J	268	775	1030	2270	350/50	-	W	-	-	-	
	35X12.50R15LT	113Q	6PR	14	10J	318	877	1150	2535	250/35	-	W	-	-	-	
16'	LT235/85R16	120/116Q	10PR	13	6 1/2J	235	806	1380/1260	3042/2778	550/80	-	W	-	-	-	
	LT235/70R16	110/107Q	8PR	13	7J	240	736	1060/975	2335/2150	450/65	-	W	-	-	-	
	LT265/75R16	119/116Q	8PR	13.5	7 1/2J	267	804	1360/1250	3000/2755	450/65	-	W	-	-	-	
	LT265/75R16	123/120Q	10PR	13.5	7 1/2J	267	804	1500/1400	3415/3085	550/80	-	W	-	-	-	
	LT285/75R16	116/113Q	6PR	13.5	8J	286	834	1250/1150	2755/2535	350/50	-	W	-	-	-	
	LT285/75R16	126/123Q	10PR	13.5	8J	286	834	1700/1550	3750/3415	550/80	-	W	-	-	-	
	LT245/70R16	118/115Q	10PR	13	7J	248	750	1320/1215	2910/2680	550/80	-	W	-	-	-	
17'	LT265/65R17	120/117Q	10PR	13.5	8J	272	782	1400/1285	3085/2835	550/80	-	W	-	-	-	
	LT265/70R17	121/118Q	10PR	13.5	8J	272	804	1450/1320	3195/2910	550/80	-	W	-	-	-	
	LT285/70R17	121/118Q	8PR	13.5	8 1/2J	292	832	1450/1320	3195/2910	450/65	-	W	-	-	-	
	35X12.50R17LT	121Q	10PR	14	10J	318	877	1450	3195	450/65	-	W	-	-	-	
18'	33X12.50R18LT	118Q	10PR	14	10J	318	826	1320	2910	450/65	-	W	-	-	-	
	35X12.50R18LT	118Q	8PR	14	10J	318	877	1320	2910	350/50	-	W	-	-	-	
20'	33X12.50R20LT	114Q	10PR	14	10J	318	826	1180	2600	450/65	-	W	-	-	-	
	35X12.50R20LT	121Q	10PR	14	10J	318	877	1450	3195	450/65	-	W	-	-	-	
22'	33X12.50R22LT	109Q	10PR	14	10J	318	832	1030	2270	450/65	-	B	-	-	-	

M/T

SONIX



VAN LT

HOT



PRIMEVAN 9 PRIMEVAN 28 PRIMEVAN 36



LOADING PRO



GLORYTOUR 52


PRIMEVAN 9



PCR | UHP | SUV | 4X4/LT | VAN

Drainage | 4 season | Oil | Stability

Performance test:



M+S

RIM SIZE	14 - 17
SPEED RATING	R - T



Zigzag grooves
Zigzag pattern grooves design. Classic zigzag grooves provide excellent driving stability, and assure a smooth and comfort able ride.

Simulate Design
Simulate double "Y" tread pattern design design grip performance without reducing tread blocks' rigidity, design braking distance, and design driving safety.

Silence design
Silence design of steel sheets. 700 pieces sipes divide the "Z" type tread blocks into small pieces' greatly reduce tire noise and improve driving comfort, enjoying quiet and comfortable drive that same series tires cannot bring.

White sidewall design
The white sidewall with 20mm width design is provided beautiful and dignified, suitable for car modification.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
14'	165/70R14C	89/87R	6	8.5	5J	170	588	580/545	1279/1202	375/54	-	B	C	C	71	B
	175/65R14C	90/88R	6	8.5	5J	177	584	600/560	1323/1235	375/54	-	B	C	C	71	B
	185R14C	102/100R	8	8.2	5 1/2J	188	650	850/800	1875/1765	450/65	-	B	C	C	71	B
	185R14C	102/100R	8	9	5 1/2J	188	650	850/800	1875/1765	450/65	-	W	C	C	71	B
	195R14C	106/104R	8	8.2	5 1/2J	198	666	950/900	2094/1984	450/65	-	B	C	C	71	B
	195R14C	106/104R	8	9	5 1/2J	198	666	950/900	2094/1984	450/65	-	W	C	C	71	B
	205R14C	109/107R	8	8.5	6J	208	686	1030/975	2271/2150	450/65	-	B	C	C	72	B
	205/75R14C	109/107R	8	8.5	5 1/2J	203	664	1030/975	2271/2149	475/69	-	B/W	C	C	72	B
	215R14C	112/110R	8	9	6J	218	700	1120/1060	2469/2337	450/65	-	B	C	C	72	B
	215/75R14C	112/110R	8	8.5	6J	216	678	1120/1060	2469/2337	475/69	-	B	C	C	72	B
15'	185R15C	103/102R	8	8.2	5 1/2J	188	674	875/850	1929/1874	450/65	-	B	C	C	71	B
	195R15C	106/104R	8	9	5 1/2J	196	693	950/900	2094/1984	450/65	-	W	C	C	71	B
	195R15C	106/104R	8	8.2	5 1/2J	196	693	950/900	2094/1984	450/65	-	B	C	C	71	B
	195/70R15C	104/102R	8	9	6J	201	655	900/850	1984/1874	450/65	-	B	C	C	71	B
	205/70R15C	106/104R	8	8.5	6	209	669	950/900	2094/1984	450/65	-	B	C	C	72	B
	205/75R15C	109/107R	8	8.5	5 1/2J	203	689	1030/975	2271/2149	475/69	-	W	C	C	72	B
	215/65R15C	104/102R	6	8.5	6.5	221	661	900/850	1984/1874	375/54	-	B	C	C	72	B
	215/70R15C	104/101R	8	9	6 1/2J	221	683	900/825	1984/1819	450/65	-	B	C	C	72	B
	225/70R15C	112/110R	8	8.5	6.5	228	697	1120/1060	2469/2337	450/65	-	B	C	C	72	B
16'	175/75R16C	101/99R	8	9	5J	177	668	825/775	1819/1705	475/69	-	B	C	C	71	B
	195/60R16C	99/97T	6	8.5	6	201	640	775/730	1709/1609	375/54	-	B	C	C	71	B
	195/75R16C	107/105R	8	9	5 1/2J	196	698	975/925	2149/2039	475/69	-	B	C	C	71	B
	205/65R16C	107/105R	8	9	6J	209	672	975/925	2149/2039	475/69	-	B	C	C	72	B
	205/75R16C	110/108R	8	8.5	5.5	203	714	1060/1000	2337/2204	475/69	-	B	C	C	72	B
	215/60R16C	103/101T	6	8.5	6.5	221	664	875/825	1929/1819	375/54	-	B	C	C	72	B
	215/65R16C	109/107R	8	9	6 1/2J	221	686	1030/975	2271/2149	475/69	-	B	C	C	72	B
	215/70R16C	108/106R	6	8.5	6 1/2J	221	708	1000/950	2205/2094	375/54	-	B	C	C	72	B
	225/65R16C	112/110R	8	9	6 1/2J	228	698	1120/1060	2469/2337	475/69	-	B	C	C	72	B
	225/75R16C	116/114R	8	8.5	6J	223	744	1250/1180	2756/2601	475/69	-	B	C	C	72	B
	235/65R16C	115/113R	8	9	7J	240	712	1215/1150	2679/2535	475/69	-	B	C	C	72	B
17'	215/60R17C	109/107T	8	8.5	6 1/2J	221	690	1030/975	2271/2149	475/69	-	B	C	C	72	B


PRIMEVAN 28



PCR | UHP | SUV | 4X4/LT | VAN

Drainage | 4 season | Oil | Stability

Performance test:



M+S

RIM SIZE	12 - 14
SPEED RATING	Q - S



Zigzag grooves
Zigzag groove design. Zigzag and trailed main grooves enhance the strong traction; improve the drainage and anti-skip performance. Large slope tread grooves design provides excellent stone removing performance.

Irregular pattern
Irregular pattern and multi-pitch design brings silence and comfortable ride.

Close shoulder
Coherent close shoulder design. Enhanced rid and coherent close block design on shoulder prevents the leaning-grind caused by heavy rigidity, and remain the high-speed turning agility at the same time.

3D steel sheets
3D interlaced steel sheets design. 3D interlaced steel sheets increase the grip ability, braking force and safety of driving.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
12'	145R12C	86/84Q	8	7.5	4.00B	145	537	530/500	1168/1102	450/65	-	B	D	C	70	B
	155R12LT/C	83/81S	6	7.5	4.50B	157	553	487/462	1074/1019	350/51	-	B	D	C	70	B
	155R12LT/C	88/86S	8	7.5	4.50B	157	553	560/530	1235/1168	450/65	-	B	D	C	70	B
	155/70R12LT	104/102R	12	7.5	4.50B	157	523	900/850	1984/1874	650	-	B	D	C	70	B
	5.00R12LT	83/81Q	8	7.5	3.50B	143	568	487/462	1074/1019	450/65	-	B	D	C	70	B
	5.50R12LT	92/90Q	10	7.5	3.50B	160	595	630/600	1389/1323	560/81	-	B	D	C	70	B
13'	5.50R13LT	88/84Q	8	7.5	4.00B	160	620	560/500	1235/1102	460/67	-	B	D	C	70	B
	145R13C	88/86Q	8	7.5	4.00B	147	566	560/530	1235/1168	450/65	-	B	D	C	70	B
	155R13LT/C	90/88Q	8	7.5	4.50B	157	578	600/560	1323/1235	450/65	-	B	D	C	70	B
	165R13LT	94/93R	8	8	4.50B	165	594	670/650	1477/1433	450/65	-	B	D	C	70	B
	165/70R13LT	88/86R	6	7.5	5.00B	170	562	560/530	1235/1168	375	-	B	D	C	70	B
	175R13LT	97/95R	8	7.5	5.00B	177	610	730/690	1609/1521	450/65	-	B	D	C	70	B
14'	165R14LT	91/90R	6	7.5	4 1/2J	165	620	615/600	1356/1323	350/51	-	B	D	C	70	B
	175R14LT	99/97R	8	7.5	5J	178	634	775/730	1709/1609	450/65	-	B	D	C	70	B
	175/70R14LT	95/93S	6	7.5	5J	177	602	690/650	1521/1433	375/54	-	B	D	C	70	B
	175/75R14LT	94/91R	8	7.5	5J	177	618	670/615	1477/1356	450/65	-	B	D	C	70	B


PRIMEVAN 36



PCR | UHP | SUV | 4X4/LT | VAN

Drainage | 4 season | Oil | Stability

Performance test:



M+S

RIM SIZE	14 - 16
SPEED RATING	R



Triple vertical grooves
Triple vertical groove design. 3 main straight line grooves improve drainage, self-cleaning and safety performance.

Multangular design
Multangular tread blocks design with approximate 90 degree stereo angle greatly improve tire's grip performance, increase off-road performance, and enhance vehicle's passage capacity in any extreme conditions.

Equal lateral sipes
3D Ups and downs shoulder design improves handling performance and ensure a safe driving.

Stone ejection design
Stone removing central grooves design possess a good function of stone remov-ing, enhance the puncture resistance and long mileages.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
14'	185R14C	102/100R	8	8.2	5 1/2J	188	650	850/800	1875/1765	450/65	-	B	D	C	71	B
	195R14C	106/104R	8	8.2	5 1/2J	198	666	950/900	2094/1984	450/65	-	B	D	C	71	B
	205R14C	109/107R	8	9	6J	208	686	1030/975	2271/2149	450/65	-	B	D	C	71	B
15'	195R15C	106/104R	8	8.2	5 1/2J	196	693	950/900	2094/1984	450/65	-	B	D	C	71	B
	195/70R15C	104/102R	8	9	6J	201	655	900/850	1984/1875	450/65	-	B	D	C	71	B
	225/70R15C	112/110R	8	9	6 1/2J	228	697	1120/1060	2470/2335	450/65	-	B	D	C	71	B
16'	185/75R16C	104/102R	8	8.2	5J	184	684	900/850	1984/1875	475/69	-	B	D	C	71	B
	195/65R16C	104/102R	8	9	6J	201	660	900/850	1984/1875	475/69	-	B	D	C	71	B
	195/75R16C	107/105R	8	9	5 1/2J	196	698	975/925	2150/2040	475/69	-	B	D	C	71	B
	205/65R16C	107/105R	8	9	6J	209	672	975/925	2149/2039	475/69	-	B	D	C	71	B
	205/75R16C	110/108R	8	9	5 1/2J	203	714	1060/1000	2335/2205	475/69	-	B	D	C	71	B
	215/75R16C	116/114R	10	8.2	6J	216	728	1250/1180	2756/2601	525/76	-	B	D	C	71	B

HOT


LOADING PRO



PCR | UHP | SUV | 4X4/LT | VAN

Drainage | 4 season | Oil | Stability

Performance test:



M+S

RIM SIZE	16
SPEED RATING	R



Low sea-land ratio (Non-saturated) tread design
Improved crown rigidness and loading capacity.

3D shoulder design
Good traction and braking performance in tough road conditions.

Tread block design
High cross density, improved grip performance.

Zigzag main groove design
Increased tread rigidness, good prevention of irregular wear under high-load operation.

Multi-sipe design
Good handling and braking performance.

inch	Size	LI/SR	P.R.	Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Pressure (kPa)	UTQG	Sidewall			Noise	
16'	185/75R16C	104/102R	8PR	5J	184	684	900/850	475		BSW	D	C	71	B
	195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	475		BSW	D	C	71	B

VAN LT


GLORYTOUR 52



PCR | UHP | SUV | 4X4/LT | VAN

Drainage | 4 season | Oil | Stability

Performance test:



M+S

RIM SIZE	16
SPEED RATING	N



Triple vertical grooves
Triple vertical groove design. 3 main straight line grooves improve drainage, self-cleaning and safety performance.

Multangular design
Multangular tread blocks design with approximate 90 degree stereo angle greatly improve tire's grip performance, increase off-road performance, and enhance vehicle's passage capacity in any extreme conditions.

Equal lateral sipes
3D Ups and downs shoulder design improves handling performance and ensure a safe driving.

Stone ejection design
Stone removing central grooves design possess a good function of stone remov-ing, enhance the puncture resistance and long mileages.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
16"	7.00R16LT	115/110N	12PR	10	5.50F	200	775	1215/1060	2679/2337	670/97	-	B	-	-		-
	7.50R16LT	122/118N	14PR	10	6.00G	215	805	1500/1320	3307/2910	770/112	-	B	-	-		-





PRIME A/S

SONIX



VAN A/S

PRIME A/S




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Comfort | High performance | Drainage | Snow&Ice

Performance test:



M+S

RIM SIZE	13 - 20
SERIES	35 - 80
SPEED RATING	T - W



Unique directional, streamlined and radial pattern design
Increase the ability of water breaking to reduce hydroplaning, quickly eliminate the road water to improve the wet handling.

Optimized tread pattern design
The pattern groove distribution and the optimized groove angle design reduce the tread pattern noise.

Innovative Four Seasons Tread compound
Compound features high grip performance and high temperature resistance, and improve the grip under low temperature conditions.

Streamlined lateral grooves supplemented by sipe design
The streamlined lateral groove improves drainage performance, ensures driving stability for better braking performance. Increased sipes ensure the heat dissipation performance along with good grip and traction.

High rigidity shoulder design
Adjusted rigidity of the shoulder block to reach more balanced grounding pressure to handle problem of swinging and eccentric for more stable driving.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
	145/70R13	71T	-	6.6	4.50B	150	534	345	761	300/44	420/A/A	B	D	C	69	B
	145/80R13	75T	-	6.6	4.00B	145	562	387	853	300/44	420/A/A	B	D	C	69	B
	155/65R13	73T	-	6.6	4.50B	157	532	365	805	300/44	420/A/A	B	D	C	69	B
13'	155/70R13	75T	-	6.8	4.50B	157	548	387	853	300/44	-	B	D	C	69	B
	155/80R13	79T	-	6.6	4.50B	157	578	437	963	300/44	420/A/A	B	D	C	69	B
	165/70R13	79T	-	6.8	5.00B	170	562	437	963	300/44	-	B	D	C	69	B
	175/65R13	80T	-	6.8	5.00B	177	558	450	992	300/44	420/A/A	B	D	C	69	B
	175/70R13	82T	-	6.8	5J	177	576	475	1047	300/44	-	B	D	C	69	B
	155/65R14	75T	-	6.6	4.50B	157	558	387	853	300/44	420/A/A	B	D	C	69	B
	165/60R14	75H	-	6.6	5.00B	170	554	387	853	300/44	420/A/A	B	D	C	69	B
	165/65R14	79T	-	6.8	5J	170	570	437	963	300/44	-	B	D	C	69	B
	165/70R14	81T	-	6.8	5J	170	588	462	1019	300/44	-	B	D	C	69	B
	175/65R14	82T	-	6.8	5J	177	584	475	1047	300/44	-	B	D	C	69	B
	175/70R14	84T	-	6.8	5J	177	602	500	1102	300/44	-	B	D	C	69	B
14'	175/70R14	88TXL	-	6.8	5J	177	602	560	1235	340/50	-	B	D	C	69	B
	175/80R14	88T	-	6.8	5J	177	636	560	1235	300/44	420/A/A	B	D	C	69	B
	185/55R14	80H	-	6.8	6J	194	560	450	992	300/44	420/A/A	B	D	C	69	B
	185/60R14	82H	-	6.8	5 1/2J	189	578	475	1047	300/44	-	B	D	C	69	B
	185/65R14	86H	-	6.8	5 1/2J	189	596	530	1168	300/44	-	B	D	C	69	B
	185/70R14	88H	-	6.8	5 1/2J	189	616	560	1235	300/44	420/A/A	B	D	C	69	B
	195/70R14	91H	-	7	6J	201	630	615	1356	300/44	420/A/A	B	D	C	69	A
	165/60R15	81HXL	-	6.6	5J	170	579	462	1019	340/50	420/A/A	B	D	C	69	B
	165/65R15	81T	-	6.8	5J	170	595	462	1019	300/44	420/A/A	B	D	C	69	B
	175/55R15	77H	-	6.8	5 1/2J	182	573	412	908	300/44	420/A/A	B	D	C	69	B
	175/60R15	81H	-	6.8	5J	177	591	462	1019	300/44	420/A/A	B	D	C	69	B
	175/65R15	84H	-	6.8	5J	177	609	500	1102	300/44	-	B	D	C	69	B
	185/55R15	82H	-	6.8	6J	194	585	475	1047	300/44	-	B	D	C	69	B
	185/60R15	84H	-	6.8	5 1/2J	189	603	500	1102	300/44	-	B	D	C	69	B
15'	185/60R15	88HXL	-	6.8	5 1/2J	189	603	560	1235	340/50	-	B	D	C	69	B
	185/65R15	92TXL	-	6.8	5 1/2J	189	621	630	1389	340/50	-	B	D	C	69	B
	195/50R15	82V	-	7	6J	201	577	475	1047	300/44	-	B	D	C	70	B
	195/55R15	85H	-	7	6J	201	595	515	1135	300/44	-	B	D	C	70	B
	195/60R15	88H	-	7	6J	201	615	560	1235	300/44	-	B	D	C	70	B
	195/65R15	91H	-	7	6J	201	635	615	1356	300/44	-	B	C	C	70	B
	195/65R15	95VXL	-	7	6J	201	635	690	1521	340/50	-	B	C	C	70	B
	205/65R15	94V	-	7	6J	209	647	670	1477	300/44	-	B	C	C	71	B
	215/65R15	96H	-	7	6 1/2J	221	661	710	1565	300/44	420/A/A	B	C	C	71	B
	195/45R16	84VXL	-	7	6 1/2J	195	582	500	1102	340/50	-	B	C	C	70	B
	195/50R16	88VXL	-	7	6J	201	602	560	1235	340/50	420/A/A	B	D	C	71	B
	195/55R16	91VXL	-	7	6J	201	620	615	1356	340/50	-	B	C	C	70	B
	195/60R16	89H	-	7	6J	201	640	580	1278	300/44	420/A/A	B	C	C	70	B
	205/45ZR16	87WXL	-	7	7J	206	590	545	1201	340/50	420/A/A	B	C	C	71	B
	205/50ZR16	91WXL	-	7	6 1/2J	214	612	615	1356	340/50	420/A/A	B	C	C	71	B
	205/55R16	91H	-	7	6 1/2J	214	632	615	1356	300/44	-	B	C	C	71	B
	205/55R16	91V	-	7	6 1/2J	214	632	615	1356	300/44	-	B	C	C	71	B
16'	205/55R16	94VXL	-	7	6 1/2J	214	632	670	1477	340/50	-	B	C	C	71	B
	205/60R16	96VXL	-	7	6J	209	652	710	1565	340/50	-	B	C	C	71	B
	215/45R16	90VXL	-	7	7J	213	600	600	1323	340/50	420/A/A	B	C	C	71	B
	215/55R16	97VXL	-	7	7J	226	642	730	1609	340/50	-	B	C	C	71	B
	215/60R16	99HXL	-	7	6 1/2J	221	664	775	1709	340/50	-	B	C	C	71	B
	215/65R16	102HXL	-	7	6 1/2J	221	686	850	1874	340/50	420/A/A	B	C	C	71	B
	215/70R16	100H	-	7	6 1/2J	221	708	800	1764	300/44	420/A/A	B	C	C	71	B
	225/55ZR16	99WXL	-	7	7J	233	654	775	1709	340/50	420/A/A	B	C	C	71	B
	225/60R16	98H	-	7.2	6 1/2J	228	676	750	1653	300/44	420/A/A	B	C	C	71	B
	235/60R16	100H	-	7.2	7J	240	688	800	1764	300/44	420/A/A	B	C	C	71	B
	205/40ZR17	84WXL	-	7	7 1/2J	212	596	500	1102	340/50	420/A/A	B	C	C	71	B
	205/45ZR17	88WXL	-	7	7J	206	616	560	1235	340/50	420/A/A	B	C	C	71	B
	205/50ZR17	93WXL	-	7.2	6 1/2J	214	638	650	1433	340/50	-	B	C	C	71	B
	205/55ZR17	95WXL	-	7	6 1/2J	214	658	690	1521	340/50	-	B	C	C	71	B
	215/40ZR17	87WXL	-	7	7 1/2J	218	604	545	1201	340/50	420/A/A	B	C	C	71	B
	215/45ZR17	91WXL	-	7	7J	213	626	615	1356	340/50	420/A/A	B	C	C	71	B
	215/50ZR17	95WXL	-	7.2	7J	226	648	690	1521	340/50	-	B	C	C	71	B
	215/55ZR17	98WXL	-	7	7J	226	668	750	1653	340/50	-	B	C	C	71	B
	215/60R17	96H	-	7	6 1/2J	221	690	710	1565	300/44	-	B	C	C	71	B
17'	215/65R17	99T	-	7	6 1/2J	221	712	775	1709	300/44	420/A/A	B	C	C	71	B
	225/45ZR17	94WXL	-	7.2	7 1/2J	225	634	670	1477	340/50	-	B	C	C	71	B
	225/50ZR17	98WXL	-	7.2	7J	233	658	750	1653	340/50	-	B	C	C	71	B
	225/55ZR17	101WXL	-	7	7J	233	680	825	1819	340/50	420/A/A	B	C	C	71	B
	225/60R17	99H	-	7	6 1/2J	228	702	775	1709	300/44	420/A/A	B	C	C	71	B
	225/65R17	106HXL	-	7.2	6 1/2J	228	724	950	2094	340/50	-	B	C	C	71	B
	235/45ZR17	97WXL	-	7.2	8J	236	644	730	1609	340/50	-	B	C	C	71	B
	235/55ZR17	103WXL	-	7.2	7 1/2J	245	690	875	1929	340/50	420/A/A	B	C	C	71	B
	235/65R17	108HXL	-	7.2	7J	240	738	1000	2205	340/50	420/A/A	B	C	C	71	B
	245/45ZR17	99WXL	-	7.2	8J	243	652	775	1709	340/50	420/A/A	B	C	C	71	B
	255/60R17	110HXL	-	7.2	7 1/2J	260	738	1060	2337	340/50	420/A/A	B	C	C	72	B
	215/55R18	99VXL	-	7.2	7J	226	693	775	1709	340/50	420/A/A	B	C	C	71	B
	225/40ZR18	92WXL	-	7.2	8J	230	637	630	1389	340/50	-	B	C	C	71	B
	225/45ZR18	95WXL	-	7.2	7 1/2J	225	659	690	1521	340/50	420/A/A	B	C	C	71	B
	225/50ZR18	99WXL	-	7.2	7J	233	683	775	1709	340/50	420/A/A	B	C	C	71	B
	225/55R18	98V	-	7.2	7J	233	705	750	1653	300/44	-	B	C	C	71	B
	235/40ZR18	95WXL	-	7.2	8 1/2J	241	645	690	1521	340/50	420/A/A	B	C	C	72	B
18'	235/45ZR18	98WXL	-	7.2	8J	236	669	750	1653	340/50	420/A/A	B	C	C	72	B
	235/50ZR18	101WXL	-	7.2	7 1/2J	245	693	825	1819	340/50	-	B	C	C	72	B
	235/55R18	104VXL	-	7.2	7 1/2J	245	715	900	1984	340/50	420/A/A	B	C	C	71	B
	235/60R18	107VXL	-	7.2	7J	240	739	975	2149	340/50	-	B	C	C	72	B
	245/40ZR18	97WXL	-	7.2	8 1/2J	248	653	730	1609	340/50	420/A/A	B	C	C	72	B
	245/45ZR18	100WXL	-	7.2	8J	243	677	800	1764	340/50	-	B	C	C	72	B
	255/55R18	105V	-	7.2	8J	265	737	925	2039	300/44	420/A/A	B	C	C	72	B
	255/60R18	112HXL	-	7.2	7 1/2J	260	763	1120	2469	340/50	420/A/A	B	C	C	72	B
	155/70R19	84T	-	6.8	4 1/2J	157	701	500	1102	300/44	420/A/A	B	C	C	69	B
	205/55R19	97VXL	-	7	6 1/2J	214	709	730	1609	340/50	420/A/A	B	C	C	71	B
	225/35ZR19	88WXL	-	7.2	8J	230	641	560	1235	340/50	420/A/A	B	C	C	71	B
	225/40ZR19	93WXL	-	7.2	8J	230	663	650	1433	340/50	420/A/A	B	C	C	71	B
	225/45ZR19	96WXL	-	7.2	7 1/2J	225	685	710	1565	340/50	420/A/A	B	C	C	71	B
	225/55R19	99V	-	7	7J	233	731	775	1709	300/44	420/A/A	B	C	C	71	B
19'	235/35ZR19	91WXL	-	7.2	8 1/2J	241	647	615	1356	340/50	420/A/A	B	C	C	72	B
	235/45ZR19	99WXL	-	7.2	8J	236	695	775	1709	340/50	420/A/A	B	C	C	72	B
	235/55R19	105VXL	-	7.2	7 1/2J	245	741	925	2039	340/50	-	B	C	C	72	B
	245/40ZR19	98WXL	-	7.2	8 1/2J	248	679	750	1653	340/50	420/A/A	B	C	C	72	B
	245/45ZR19	102WXL	-	7.2	8J	243	703	850	1874	340/50	420/A/A	B	C	C	72	B
	255/35ZR19	96WXL	-	7.2	9J	260	661	710	1565	340/50	420/A/A	B	C	C	72	B
	255/40ZR19	100WXL	-	7.2	9J	260	687	800	1764	340/50	420/A/A	B	C	C	72	B
	285/45R19	111VXL	-	7.5	9 1/2J	285	739	1090	2403	340/50	420/A/A	B	C	C	73	B
	195/55R20	91V	-	7	6J	201	722	615	1356	300/44	420/A/A	B	C	C	70	B
	245/35ZR20	95WXL	-	7.2	8 1/2J	248	680	690	1521	340/50	420/A/A	B	C	C	72	B
	245/40ZR20	99WXL	-	7.2	8 1/2J	248	704	775	1709	340/50	420/A/A	B	C	C	72	B
	255/35ZR20	97WXL	-	7.2	9J	260	686	730	1609	340/50	420/A/A	B	C	C	72	B
20'	255/40ZR20	101WXL	-	7.2	9J	260	712	825	1819	340/50	420/A/A	B	C	C	72	B
	255/45ZR20	105WXL	-	7.2	8 1/2J	255	738	925	2039	340/50	420/A/A	B	C	C	72	B
	265/45R20	108VXL	-	7.5	9J	266	746	1000	2205	340/50	420/A/A	B	C	C	72	B
	315/35ZR20	110WXL	-	7.5	11J	320	728	1060	2337	340/50	420/A/A	B	C	C	73	B

ALL SEASON

VAN A/S




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Comfort | High performance | Drainage | Snow&Ice

Performance test:



M+S

RIM SIZE	14 - 17
SERIES	60 - 75
SPEED RATING	R - H



Three stepped longitudinal main groove design
Excellent drainage performance and firm grip on wet and dry roads.

Unique design of the block and the high-density sipe
Ensure the good heat dissipation of the block with great grip and traction.

Wide shoulder block design
Improve the robustness of the block and the durability and load capacity of the tire; enhance the steering performance.

Low noise pattern design
Close shoulder effectively prevents the noise spread; the tuned pattern extends to the rear of the shoulders to allow for evener wear and further noise elimination.

Innovative four-season tread compound
Compound features high grip performance and high temperature resistance, and improves the grip under low temperature Conditions.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
14'	175/65R14C	90/88T	6PR	8	5	177	584	600/560	1323/1235	375/54	-	B	D	C	71	B
	175/70R14C	95/93T	6PR	8	5	177	602	690/650	1521/1433	375/54	-	B	D	C	71	B
15'	195/70R15C	104/102R	8PR	8	6	201	655	900/850	1984/1874	450/65	-	B	C	C	71	B
	205/70R15C	106/104R	8PR	8	6	209	669	950/900	2094/1984	450/65	-	B	C	C	71	B
	215/70R15C	109/107R	8PR	8.5	6.5	221	683	1030/975	2271/2149	450/65	-	B	C	C	72	B
	225/70R15C	112/110R	8PR	8.5	6.5	228	697	1120/1060	2469/2337	450/65	-	B	C	C	72	B
16'	185/75R16C	104/102R	8PR	8	5	184	684	900/850	1984/1874	475/69	-	B	C	C	71	B
	195/60R16C	99/97H	6PR	8	6	201	640	775/730	1709/1609	375/54	-	B	D	C	71	B
	195/65R16C	104/102T	8PR	8	6	201	660	900/850	1984/1874	475/69	-	B	C	C	71	B
	195/75R16C	107/105R	8PR	8	5.5	196	698	975/925	2149/2039	475/69	-	B	C	C	71	B
	205/65R16C	107/105T	8PR	8	6	209	672	975/925	2149/2039	475/69	-	B	C	C	71	B
	205/75R16C	113/111R	10PR	8	5.5	203	714	1150/1090	2535/2403	525/76	-	B	C	C	71	B
	215/60R16C	103/101T	6PR	8.5	6.5	221	664	875/825	1929/1819	375/54	-	B	C	C	72	B
	215/65R16C	109/107T	8PR	8.5	6.5	221	686	1030/975	2271/2149	475/69	-	B	C	C	72	B
	215/75R16C	113/111R	8PR	8.5	6	216	728	1150/1090	2535/2403	475/69	-	B	C	C	72	B
	225/65R16C	112/110R	8PR	8.5	6.5	228	698	1120/1060	2469/2337	475/69	-	B	C	C	72	B
	225/75R16C	121/120R	10PR	8.5	6	223	744	1450/1400	3197/3086	575/83	-	B	C	C	72	B
	235/65R16C	115/113R	8PR	8.5	7	240	712	1215/1150	2679/2535	475/69	-	B	C	C	72	B
17'	215/60R17C	109/107T	8PR	8.5	6.5	221	690	1030/975	2271/2149	475/69	-	B	C	C	72	B

ALL SEASON

SONIX



WINTER
★Studded

NEW



WINTER XPRO
STUDS 68

NEW



WINTER XPRO
STUDS 69

NEW



WINTER XPRO
STUDS 77


NEW


WINTER XPRO STUDS 68



3PMSF

E



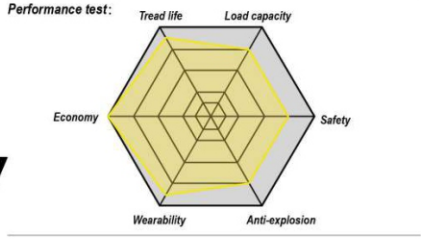


M+S

RIM SIZE	13 - 16
SERIES	50 - 75
SPEED RATING	H - T

Near square footprint design.
Large footprint area and even grounding pressure, improved the braking and starting performance of the tyre.

The continuous pattern design at the center improves the straight-line driving performance of the tyre, improves the directional stability, and improves the driving safety of the vehicle.

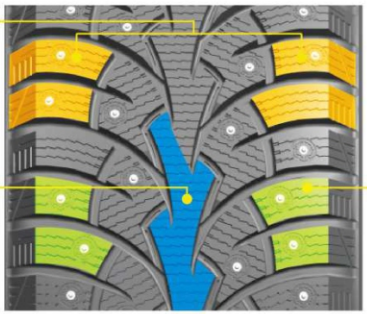

Wider driving surface width and square shoulder design. The footprint of the tyre is increased, and the grip of the tyre is improved.


The wide tread block design of the shoulder ensures the overall rigidity of the tyre on the ice and snow road, and improves the handling performance; Improve the handling performance of tyres on ice.


Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
13'	155/70R13	75T	-	9.3	4.50B	157	548	387	853	300/44	-	-	-	-	-	-
	175/70R13	82T	-	9.3	5.00B	177	576	475	1047	300/44	-	-	-	-	-	-
14'	175/65R14	86T XL	-	9.3	5J	177	584	530	1168	340/50	-	-	-	-	-	-
	175/70R14	84T	-	9.3	5J	177	602	500	1102	300/44	-	-	-	-	-	-
	185/60R14	82T	-	9.3	5 1/2J	189	578	475	1047	300/44	-	-	-	-	-	-
	185/65R14	90T XL	-	9.3	5 1/2J	189	596	600	1323	340/50	-	-	-	-	-	-
	185/70R14	92T XL	-	9.3	5 1/2J	189	616	630	1389	340/50	-	-	-	-	-	-
15'	185/55R15	86T XL	-	9.3	6J	194	585	530	1168	340/50	-	-	-	-	-	-
	185/60R15	88T XL	-	9.3	5 1/2J	189	603	560	1235	340/50	-	-	-	-	-	-
	185/65R15	88T	-	9.3	5 1/2J	189	621	560	1235	300/44	-	-	-	-	-	-
	195/55R15	85H	-	9.3	6J	201	595	515	1135	300/44	-	-	-	-	-	-
	195/60R15	92T XL	-	9.3	6J	201	615	630	1389	340/50	-	-	-	-	-	-
	195/65R15	95TXL	-	9.3	6J	201	635	690	1521	340/50	-	-	-	-	-	-
	205/65R15	94T	-	9.3	6J	209	647	670	1477	300/44	-	-	-	-	-	-
16'	195/55R16	91TXL	-	9.3	6J	201	620	615	1356	340/50	-	-	-	-	-	-
	205/55R16	94T XL	-	9.3	6 1/2J	214	632	670	1477	340/50	-	-	-	-	-	-
	205/60R16	96T XL	-	9.3	6J	209	652	710	1565	340/50	-	-	-	-	-	-
	205/65R16	95T	-	9.3	6 J	209	672	690	1519	300/44	-	-	-	-	-	-
	215/55R16	97T XL	-	9.3	7J	226	642	730	1609	340/50	-	-	-	-	-	-
	215/60R16	99T XL	-	9.3	6 1/2J	221	664	775	1709	340/50	-	-	-	-	-	-
	215/65R16	102TXL	-	9.3	6 1/2J	221	686	850	1874	340/50	-	-	-	-	-	-
14'	155/65R14	75T	-	9.3	4 1/2J	157	558	387	853	300/44	-	-	-	-	-	-
	175/65R15	84T	-	9.3	5J	177	609	500	1102	300/44	-	-	-	-	-	-
15'	195/50R15	82T	-	9.3	6 J	201	577	475	1047	300/44	-	-	-	-	-	-
	205/70R15	96T	-	9.3	6J	209	669	710	1565	300/44	-	-	-	-	-	-
	225/55R16	99T XL	-	9.3	7 J	233	654	775	1709	340/50	-	-	-	-	-	-
16'	225/50R16	96TXL	-	9.3	7J	233	632	710	1565	340/50	-	-	-	-	-	-
	225/60R16	98T	-	9.3	6 1/2J	228	676	750	1653	300/44	-	-	-	-	-	-
	225/65R16	100T	-	9.3	6 1/2J	228	698	800	1764	300/44	-	-	-	-	-	-

NEW

WINTER XPRO STUDS 69






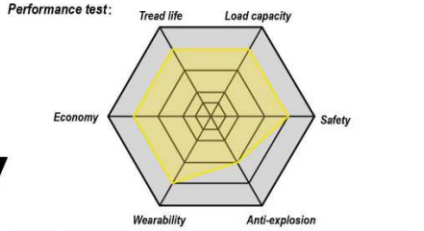


M+S

RIM SIZE	17 - 22
SERIES	35 - 60
SPEED RATING	H - T

Studded design.
The single guiding pattern is arranged with 90 left and right nail holes per meter to ensure the vehicle's strong grip on the ice surface under the extreme cold temperature.



Ice crystal snowflake nail hole protection design.
A snowflake mark of ≥ 7mm is set around the insert to completely fill the rubber, enhance the rigidity of the tread block around the nail, and prevent the insert from falling or the nail hole from being torn during driving.



- **The 11mm deep nail hole design, together with the special light truck insert, improves the ice grip performance under light truck load, and prevents the insert from falling.**



- **Velvet sidewall logo design.**
The design of cars is becoming more and more beautiful, and the requirements for the appearance of tyres are also getting higher and higher.
- **The snowflake mark makes the position of the stud more obvious.**

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
17'	205/50R17	93T XL	-	10.3	6 1/2J	214	638	650	1433	340/50	-	-	-	-	-	-
	205/55R17	95TXL	-	10.3	6 1/2J	214	658	690	1519	340/50	-	-	-	-	-	-
	215/45R17	91TXL	-	10.3	7 J	213	626	615	1354	340/50	-	-	-	-	-	-
	215/50R17	95T XL	-	10.3	7J	226	648	690	1521	340/50	-	-	-	-	-	-
	215/55R17	98T XL	-	10.3	7J	226	668	750	1653	340/50	-	-	-	-	-	-
	225/45R17	94H XL	-	10.3	7 1/2J	225	634	670	1477	340/50	-	-	-	-	-	-
	225/50R17	98H XL	-	10.3	7J	233	658	750	1653	340/50	-	-	-	-	-	-
	225/55R17	101HXL	-	10.3	7J	233	680	825	1819	340/50	-	-	-	-	-	-
	235/45R17	97TXL	-	10.3	8 J	236	644	730	1607	340/50	-	-	-	-	-	-
	235/55R17	103TXL	-	10.3	7 1/2J	245	690	875	1926	340/50	-	-	-	-	-	-
18'	215/55R18	95T	-	10.3	7J	226	693	690	1521	300/44	-	-	-	-	-	-
	225/40R18	92TXL	-	10.3	8J	230	637	630	1389	340/50	-	-	-	-	-	-
	225/45R18	95T XL	-	10.3	7 1/2J	225	659	690	1521	340/50	-	-	-	-	-	-
	225/50R18	99TXL	-	10.3	7J	233	683	775	1706	340/50	-	-	-	-	-	-
	225/55R18	102TXL	-	10.3	7 J	233	705	850	1871	340/50	-	-	-	-	-	-
	235/45R18	98TXL	-	10.3	8J	236	669	750	1653	340/50	-	-	-	-	-	-
	235/50R18	101TXL	-	10.3	7 1/2J	245	693	825	1816	340/50	-	-	-	-	-	-
	245/40R18	97T XL	-	10.3	8 1/2J	248	653	730	1607	340/50	-	-	-	-	-	-
	245/45R18	100T XL	-	10.3	8J	243	677	800	1764	340/50	-	-	-	-	-	-
	255/35R18	94TXL	-	10.3	9 J	260	635	670	1477	340/50	-	-	-	-	-	-
	255/40R18	99TXL	-	10.3	9J	260	661	775	1709	340/50	-	-	-	-	-	-
	265/35R18	97TXL	-	10.3	9 1/2J	271	643	730	1607	340/50	-	-	-	-	-	-
	275/40R18	103TXL	-	10.3	9 1/2J	278	677	875	1929	340/50	-	-	-	-	-	-
19'	225/40R19	93T XL	-	10.3	8J	230	663	650	1433	340/50	-	-	-	-	-	-
	225/55R19	103TXL	-	10.3	7 J	233	731	875	1926	340/50	-	-	-	-	-	-
	235/35R19	91TXL	-	10.3	8 1/2J	241	647	615	1356	340/50	-	-	-	-	-	-
	235/40R19	96T XL	-	10.3	8 1/2J	241	671	710	1565	340/50	-	-	-	-	-	-
	235/50R19	103TXL	-	10.3	7 1/2J	245	719	875	1926	340/50	-	-	-	-	-	-
	245/40R19	98TXL	-	10.3	8 1/2J	248	679	750	1651	340/50	-	-	-	-	-	-
	245/45R19	98T	-	10.3	8J	243	703	750	1653	300/44	-	-	-	-	-	-
	255/35R19	96T XL	-	10.3	9J	260	661	710	1565	340/50	-	-	-	-	-	-
	255/40R19	100T XL	-	10.3	9J	260	687	800	1761	340/50	-	-	-	-	-	-
	255/45R19	104T XL	-	10.3	8 1/2J	255	713	900	1981	340/50	-	-	-	-	-	-
	255/50R19	103T	-	10.3	8J	265	739	875	1929	300/44	-	-	-	-	-	-
	275/35R19	100TXL	-	10.3	9 1/2J	278	675	800	1761	340/50	-	-	-	-	-	-
	275/40R19	105TXL	-	10.3	9 1/2J	278	703	925	2039	340/50	-	-	-	-	-	-
	285/45R19	111TXL	-	10.3	9 1/2J	285	739	1090	2400	340/50	-	-	-	-	-	-
20'	235/55R20	102T	-	10.3	7 1/2J	245	766	850	1871	300/44	-	-	-	-	-	-
	245/40R20	99TXL	-	10.3	8 1/2J	248	704	775	1706	340/50	-	-	-	-	-	-
	245/45R20	103TXL	-	10.3	8J	243	728	875	1929	340/50	-	-	-	-	-	-
	245/50R20	105TXL	-	10.3	7 1/2J	253	754	925	2036	340/50	-	-	-	-	-	-
	255/35R20	97TXL	-	10.3	9J	260	686	730	1607	340/50	-	-	-	-	-	-
	255/40R20	101TXL	-	10.3	9J	260	712	825	1819	340/50	-	-	-	-	-	-
	255/45R20	101T	-	10.3	8 1/2J	255	738	825	1819	300/44	-	-	-	-	-	-
	255/50R20	109TXL	-	10.3	8J	265	764	109	240	340/50	-	-	-	-	-	-
	255/55R20	110TXL	-	10.3	8J	265	788	1060	2334	340/50	-	-	-	-	-	-
	265/50R20	107T	-	10.3	8 1/2J	277	774	975	2149	300/44	-	-	-	-	-	-
	275/35R20	102TXL	-	10.3	9 1/2J	278	700	850	1871	340/50	-	-	-	-	-	-
	275/40R20	102T	-	10.3	9 1/2J	278	728	850	1874	300/44	-	-	-	-	-	-
	275/45R20	110T XL	-	10.3	9J	273	756	1060	2337	340/50	-	-	-	-	-	-
	275/50R20	113TXL	-	10.3	8 1/2J	284	784	1150	2535	340/50	-	-	-	-	-	-
	285/50R20	112T	-	10.3	9J	297	794	1120	2469	300/44	-	-	-	-	-	-
	305/40R20	112T XL	-	10.3	11J	313	752	1120	2469	340/50	-	-	-	-	-	-
	315/35R20	106T	-	10.3	11J	320	728	950	2094	300/44	-	-	-	-	-	-
21'	275/40R21	107TXL	-	10.3	9 1/2J	278	753	975	2147	340/50	-	-	-	-	-	-
	275/45R21	110T XL	-	10.3	9J	273	781	1060	2334	340/50	-	-	-	-	-	-
	285/40R21	109T XL	-	10.3	10J	290	761	1030	2271	340/50	-	-	-	-	-	-
	285/45R21	113T XL	-	10.3	9 1/2J	285	789	1030	2268	340/50	-	-	-	-	-	-
	295/35R21	107TXL	-	10.3	10 1/2J	301	739	975	2149	340/50	-	-	-	-	-	-
	295/40R21	107T	-	10.3	10 1/2J	301	769	975	2149	300/44	-	-	-	-	-	-
	315/35R21	111T XL	-	10.3	11J	320	753	1090	2403	340/50	-	-	-	-	-	-
	315/40R21	111T	-	10.3	11J	320	785	1090	2403	300/44	-	-	-	-	-	-
22'	275/40R22	107TXL	-	10.3	9 1/2J	278	779	975	2147	340/50	-	-	-	-	-	-
	285/45R22	114TXL	-	10.3	9 1/2J	285	815	1180	2598	340/50	-	-	-	-	-	-
	275/50R22	115TXL	-	10.3	8 1/2J	284	835	1215	2675	340/50	-	-	-	-	-	-
	315/35R22	111TXL	-	10.3	11J	320	779	1090	2403	340/50	-	-	-	-	-	-
20'	265/55R20	113T XL	-	10.3	8 1/2J	277	800	1150	2535	340/50	-	-	-	-	-	-
17'	245/40R17	95T XL	-	10.3	8 1/2J	248	628	690	1521	340/50	-	-	-	-	-	-
19'	245/35R19	93T XL	-	10.3	8 1/2J	248	655	650	1433	340/50	-	-	-	-	-	-
20'	275/30R20	97T XL	-	10.3	9 1/2J	278	674	730	1609	340/50	-	-	-	-	-	-
	245/35R20	95T XL	-	10.3	8 1/2J	248	680	690	1521	340/50	-	-	-	-	-	-


WINTER

NEW

WINTER XPRO STUDS 77






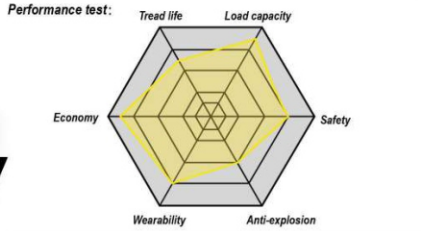

M+S

RIM SIZE	16 - 20
SERIES	55 - 75
SPEED RATING	T

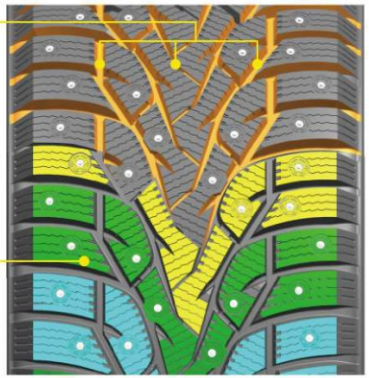

The crisscrossing pattern groove form with a high proportion of sea-land ratio improves the comprehensive snow removal and drainage performance of tyres on ice and snow roads, enhances the traction of tyres in the driving surface, increases the braking performance of tyres, and improves the safety performance of vehicles.


Silent pattern design.
The pitch design of the two-in-one composite design and the interactive pattern groove design in the center position are helpful to reducing the pattern noise of the tyre in the high-speed state.

- Widened horizontal and longitudinal grooves can effectively improve the snow removal ability of tyres in snowy conditions and enhance the snow safety of vehicles.

- Velvet sidewall logo design.
The design of cars is becoming more and more beautiful, and the requirements for the appearance of tyres are also getting higher and higher. Therefore, the font of the trademark and product line on the tyre are designed with velvet to highlight the grade of the tyre.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
16'	215/70R16	100T	-	9.3	6 1/2J	221	708	800	1764	300/44	-	-	-	-	-	-
	225/70R16	107TXL	-	10.3	6 1/2J	228	722	975	2149	340/50	-	-	-	-	-	-
	245/70R16	111TXL	-	10.3	7 J	248	750	1090	2403	340/50	-	-	-	-	-	-
17'	215/60R17	100TXL	-	10.3	6 1/2J	221	690	800	1761	340/50	-	-	-	-	-	-
	215/65R17	103TXL	-	10.3	6 1/2J	221	712	875	1929	340/50	-	-	-	-	-	-
	225/60R17	103T XL	-	10.3	6 1/2J	228	702	875	1926	340/50	-	-	-	-	-	-
	225/65R17	106TXL	-	10.3	6 1/2J	228	724	950	2094	340/50	-	-	-	-	-	-
	235/65R17	108TXL	-	10.3	7J	240	738	1000	2205	340/50	-	-	-	-	-	-
	265/65R17	112T	-	10.3	8J	272	776	1120	2469	300/44	-	-	-	-	-	-
18'	225/60R18	104TXL	-	10.3	6 1/2J	228	727	900	1981	340/50	-	-	-	-	-	-
	235/55R18	104TXL	-	10.3	7 1/2J	245	715	900	1981	340/50	-	-	-	-	-	-
	235/60R18	103T	-	10.3	7J	240	739	875	1929	300/44	-	-	-	-	-	-
	245/60R18	109TXL	-	10.3	7 J	248	751	1030	2268	340/50	-	-	-	-	-	-
	255/55R18	109TXL	-	10.3	8 J	265	737	1030	2268	340/50	-	-	-	-	-	-
	265/60R18	114TXL	-	10.3	8 J	272	775	1180	2598	340/50	-	-	-	-	-	-
19'	235/55R19	105TXL	-	10.3	7 1/2J	245	741	925	2039	340/50	-	-	-	-	-	-
	245/55R19	107TXL	-	10.3	7 1/2J	253	753	975	2147	340/50	-	-	-	-	-	-
	255/55R19	107T	-	10.3	8J	265	763	975	2149	300/44	-	-	-	-	-	-
20'	275/55R20	117TXL	-	10.3	8 1/2J	284	810	1285	2829	340/50	-	-	-	-	-	-
16'	185/75R16C	104/102R	8PR	11.3	5J	184	684	900/850	1985/1875	475/69	-	-	-	-	-	-
	195/75R16C	107/105R	8PR	11.3	5 1/2J	196	698	975/925	2150/2040	475/69	-	-	-	-	-	-
	225/75R16C	116/114R	8PR	11.3	6J	223	744	1250/1180	2755/2600	475/69	-	-	-	-	-	-
	LT225/75R16	115/112Q	10PR	11.3	6J	223	744	1215/1120	2680/2470	550/80	-	-	-	-	-	-
	235/65R16C	121/119R	-	11.3	7J	240	712	1450/1360	3197/2998	575/83	-	-	-	-	-	-
	245/75R16	111T	-	11.3	5J	248	774	1090	2403	300/44	-	-	-	-	-	-
	LT245/75R16	120/116Q	10PR	11.3	7J	248	774	1380/1260	3042/2778	550/80	-	-	-	-	-	-
17'	265/70R17	115T	-	11.3	8J	272	804	1215	2679	300/44	-	-	-	-	-	-
	LT265/70R17	121/118Q	10PR	11.3	8J	272	804	1450/1320	3197/2910	550/80	-	-	-	-	-	-
18'	275/65R18	116T	-	10.3	10	8 J	279	815	1797	300/44	-	-	-	-	-	-
	LT275/65R18	123/120Q	10PR	10.3	8J	279	815	1550/1400	3417/3086	550/80	-	-	-	-	-	-
20'	275/60R20	115T	-	10.3	8J	279	838	1215	2679	300/44	-	-	-	-	-	-
	LT275/60R20	123/120Q	10PR	10.3	8J	279	838	1550/1400	3417/3086	550/80	-	-	-	-	-	-
18'	285/60R18	116T	-	10.3	8 1/2J	292	799	1250	2756	300/44	-	-	-	-	-	-
16'	235/70R16	106T	-	10.3	7J	240	736	950	2094	300/44	-	-	-	-	-	-
	225/65R16C	112/110R	8PR	11.3	6.5	228	698	1120/1060	2469/2337	475/69	-	-	-	-	-	-
18'	255/70R18	113T	-	10.3	7 1/2J	260	815	1150	2535	300/44	-	-	-	-	-	-
17'	245/65R17	111T XL	-	10.3	7 J	248	750	1090	2403	340/50	-	-	-	-	-	-
	255/65R17	110T	-	10.3	7 1/2J	260	764	1060	2337	300/44	-	-	-	-	-	-
18'	265/65R18	116T XL	-	10.3	8J	272	801	1250	2756	340/50	-	-	-	-	-	-
17'	235/60R17	102T	-	10.3	7 J	240	714	850	1874	300/44	-	-	-	-	-	-
	LT245/70R17	119/116Q	10PR	11.3	7 J	248	776	1360/1250	3000/2755	550/80	-	-	-	-	-	-

SONIX

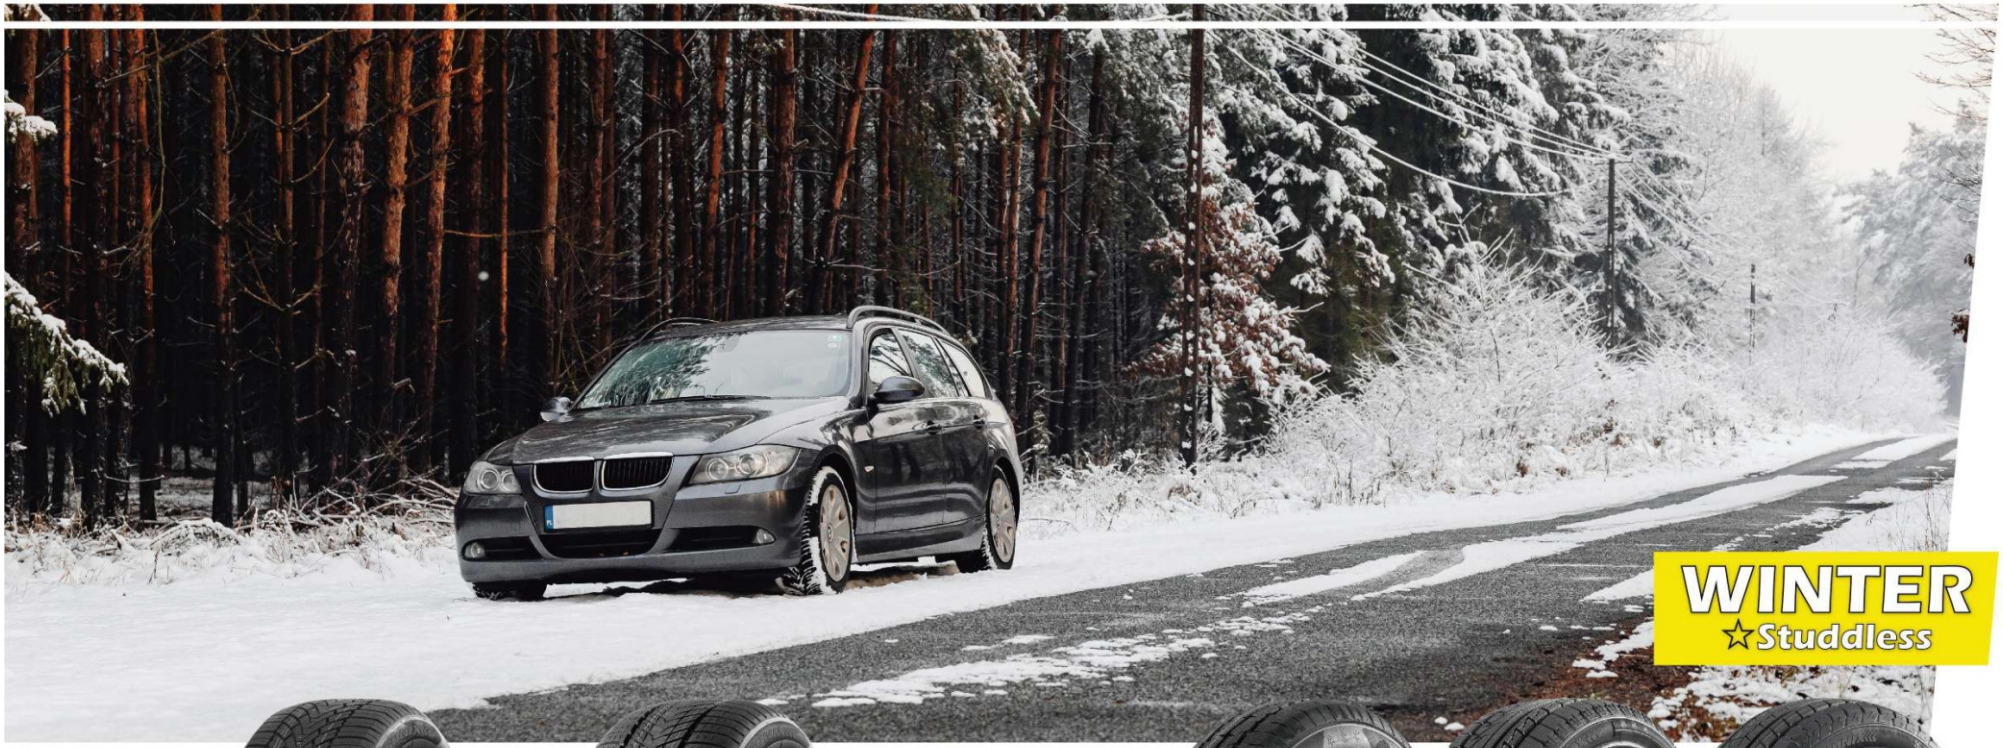



WINTER XPRO 888

WINTER XPRO 999



SNOWROVER 989

SNOWROVER 966

SNOWROVER 868

WINTER XPRO 888




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Snow&Ice | Stability | Drainage | Braking

Performance test:



M+S

RIM SIZE	13 - 20
SERIES	35 - 80
SPEED RATING	T - V



Reduced stopping distance on snow & ice.

Enhanced snow traction.

- Combination of 2D sipes in the center and 3D sipes in the shoulder area of the tread pattern provide excellent braking performance for reduced stopping distance on snow and ice covered roads.
- Zig-zag grooves with angular edges improve grip between snow in grooves and snow on road.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
	145/70R13	71T	-	7.8	4.50B	150	534	345	761	300/44	-	B	D	D	68	B
	145/80R13	75T	-	7.8	4.00B	145	562	387	853	300/44	-	B	D	D	68	B
	155/65R13	73T	-	7.8	4.50B	157	532	365	805	300/44	-	B	D	D	68	B
	155/70R13	75T	-	7.8	4.50B	157	548	387	853	300/44	-	B	D	D	68	B
13'	155/80R13	79T	-	7.8	4.50B	157	578	437	963	300/44	-	B	D	D	68	B
	165/70R13	79T	-	8	5.00B	170	562	437	963	300/44	-	B	D	D	68	B
	165/80R13	83T	-	8	4.50B	165	594	487	1074	300/44	-	B	D	D	68	B
	175/65R13	80T	-	8	5.00B	177	558	450	992	300/44	-	B	D	D	68	B
	175/70R13	82T	-	8	5.00B	177	576	475	1047	300/44	-	B	D	D	68	B
	155/65R14	75T	-	7.8	4 1/2J	157	558	387	853	300/44	-	B	D	D	68	B
	165/60R14	75H	-	8	5J	170	554	387	853	300/44	-	B	D	D	68	B
	165/65R14	79T	-	8	5J	170	570	437	963	300/44	-	B	D	D	68	B
	165/70R14	81T	-	8	5J	170	588	462	1019	300/44	-	B	D	D	68	B
	175/65R14	82T	-	8	5J	177	584	475	1047	300/44	-	B	D	D	68	B
	175/70R14	84T	-	8	5J	177	602	500	1102	300/44	-	B	D	D	68	B
14'	185/55R14	80H	-	8	6J	194	560	450	992	300/44	-	B	D	D	69	B
	185/60R14	82T	-	8	5 1/2J	189	578	475	1047	300/44	-	B	D	D	69	B
	185/65R14	86T	-	8	5 1/2J	189	596	530	1168	300/44	-	B	D	D	69	B
	185/70R14	88T	-	8	5 1/2J	189	616	560	1235	300/44	-	B	C	D	69	B
	195/60R14	86H	-	8.3	6 J	201	590	530	1168	300/44	-	B	C	D	69	B
	195/65R14	89H	-	8.3	6J	201	610	580	1279	300/44	-	B	C	D	69	B
	195/70R14	91T	-	8.3	6J	201	630	615	1356	300/44	-	B	C	D	69	B
	165/60R15	81HXL	-	8	5J	170	579	462	1019	340/50	-	B	D	D	68	B
	165/65R15	81T	-	8	5J	170	595	462	1019	300/44	-	B	D	D	68	B
	175/55R15	77H	-	8	5 1/2J	182	573	412	908	300/44	-	B	D	D	68	B
	175/60R15	81H	-	8	5J	177	591	462	1019	300/44	-	B	D	D	68	B
	175/65R15	84T	-	8	5J	177	609	500	1102	300/44	-	B	D	D	68	B
	185/55R15	82H	-	8	6 J	194	585	475	1047	300/44	-	B	D	D	68	B
	185/60R15	84H	-	8	5 1/2J	189	603	500	1102	300/44	-	B	D	D	69	B
15'	185/65R15	88T	-	8	5 1/2J	189	621	560	1235	300/44	-	B	C	D	69	B
	195/50R15	82V	-	8.3	6 J	201	577	475	1047	300/44	-	B	D	D	69	B
	195/55R15	85H	-	8.3	6 J	201	595	515	1135	300/44	-	B	D	D	69	B
	195/60R15	88H	-	8.3	6 J	201	615	560	1235	300/44	-	B	C	D	69	B
	195/65R15	95TXL	-	8.3	6J	201	635	690	1521	340/50	-	B	C	D	69	B
	205/60R15	91H	-	8.3	6J	209	627	615	1356	300/44	-	B	C	D	69	B
	205/65R15	94H	-	8.3	6 J	209	647	670	1477	300/44	-	B	C	D	69	B
	205/70R15	96T	-	8.3	6J	209	669	710	1565	300/44	-	B	C	D	69	B
	215/65R15	96H	-	8.3	6 1/2J	221	661	710	1565	300/44	-	B	C	D	69	B
	185/50R16	81V	-	8	6J	194	592	462	1019	300/44	-	B	D	D	69	B
	185/55R16	83H	-	8	6J	194	610	487	1074	300/44	-	B	D	D	69	B
	185/60R16	86H	-	8	5 1/2J	189	628	530	1168	300/44	-	B	D	D	69	B
	195/45R16	84VXL	-	8.3	6 1/2J	195	582	500	1102	340/50	-	B	C	D	69	B
	195/50R16	84V	-	8.3	6J	201	602	500	1102	300/44	-	B	C	D	69	B
	195/55R16	91HXL	-	8.3	6J	201	620	615	1356	340/50	-	B	C	D	69	B
	205/45R16	87VXL	-	8.3	7J	206	590	545	1201	340/50	-	B	C	D	69	B
	205/50R16	91VXL	-	8.3	6 1/2J	214	612	615	1356	340/50	-	B	C	D	69	B
	205/55R16	91H	-	8.3	6 1/2J	214	632	615	1356	300/44	-	B	C	D	69	B
16'	205/60R16	92H	-	8.3	6 J	209	652	630	1389	300/44	-	B	C	D	69	B
	205/65R16	95H	-	8.3	6 J	209	672	690	1521	300/44	-	B	C	D	69	B
	215/45R16	90VXL	-	8.3	7J	213	600	600	1323	340/50	-	B	C	D	69	B
	215/55R16	97HXL	-	8.3	7J	226	642	730	1609	340/50	-	B	C	D	69	B
	215/60R16	99HXL	-	8.3	6 1/2J	221	664	775	1709	340/50	-	B	C	D	69	B
	215/65R16	98T	-	8.3	6 1/2J	221	686	750	1653	300/44	-	B	C	D	69	B
	225/55R16	95H	-	8.3	7 J	233	654	690	1521	300/44	-	B	C	D	70	B
	225/60R16	98H	-	8.3	6 1/2J	228	676	750	1653	300/44	-	B	C	D	70	B
	225/65R16	100T	-	8.3	6 1/2J	228	698	800	1764	300/44	-	B	C	D	70	B
	205/40R17	84VXL	-	8.3	7 1/2J	212	596	500	1102	340/50	-	B	C	D	69	B
	205/45R17	88VXL	-	8.3	7 J	206	616	560	1235	340/50	-	B	C	D	69	B
	205/50R17	93HXL	-	8.3	6 1/2J	214	638	650	1433	340/50	-	B	C	D	69	B
	205/55R17	95HXL	-	8.3	6 1/2J	214	658	690	1521	340/50	-	B	C	D	69	B
	215/40R17	87VXL	-	8.3	7 1/2J	218	604	545	1201	340/50	-	B	C	D	69	B
	215/45R17	91VXL	-	8.3	7 J	213	626	615	1356	340/50	-	B	C	D	69	B
	215/50R17	95HXL	-	8.3	7J	226	648	690	1521	340/50	-	B	C	D	69	B
17'	215/55R17	98VXL	-	8.3	7J	226	668	750	1653	340/50	-	B	C	D	69	B
	225/45R17	94VXL	-	8.3	7 1/2J	225	634	670	1477	340/50	-	B	C	D	70	B
	225/50R17	98HXL	-	8.3	7J	233	658	750	1653	340/50	-	B	C	D	70	B
	225/55R17	101HXL	-	8.3	7 J	233	680	825	1819	340/50	-	B	C	D	70	B
	235/45R17	97HXL	-	8.5	8J	236	644	730	1609	340/50	-	B	C	D	70	B
	235/55R17	103HXL	-	8.5	7 1/2J	245	690	875	1929	340/50	-	B	C	D	70	B
	245/40R17	95VXL	-	8.5	8 1/2J	248	628	690	1521	340/50	-	B	C	D	70	B
	245/45R17	99VXL	-	8.5	8 J	243	652	775	1709	340/50	-	B	C	D	70	B
	215/45R18	93VXL	-	8.3	7J	213	651	650	1433	340/50	-	B	C	D	69	B
	215/55R18	99HXL	-	8.3	7 J	226	693	775	1709	340/50	-	B	C	D	69	B
	225/40R18	92HXL	-	8.3	8J	230	637	630	1389	340/50	-	B	C	D	70	B
	225/45R18	95HXL	-	8.3	7 1/2J	225	659	690	1521	340/50	-	B	C	D	70	B
	225/50R18	99HXL	-	8.3	7J	233	683	775	1709	340/50	-	B	C	D	70	B
	225/55R18	98H	-	8.3	7J	233	705	750	1653	300/44	-	B	C	D	70	B
	235/40R18	95VXL	-	8.5	8 1/2J	241	645	690	1521	340/50	-	B	C	D	70	B
18'	235/45R18	98HXL	-	8.5	8J	236	669	750	1653	340/50	-	B	C	D	70	B
	235/50R18	97V	-	8.5	7 1/2J	245	693	730	1609	300/44	-	B	C	D	70	B
	235/55R18	104HXL	-	8.5	7 1/2J	245	715	900	1984	340/50	-	B	C	D	70	B
	245/40R18	97VXL	-	8.5	8 1/2J	248	653	730	1609	340/50	-	B	C	D	70	B
	245/45R18	100HXL	-	8.5	8J	243	677	800	1764	340/50	-	B	C	D	70	B
	245/50R18	104HXL	-	8.5	7 1/2J	253	703	900	1984	340/50	-	B	C	D	70	B
	255/40R18	99HXL	-	8.5	9J	260	661	775	1709	340/50	-	B	C	D	70	B
	255/45R18	99V	-	8.5	8 1/2J	255	687	775	1709	300/44	-	B	C	D	70	B
	225/40R19	93VXL	-	8.3	8J	230	663	650	1433	340/50	-	B	C	D	70	B
	225/45R19	96VXL	-	8.3	7 1/2J	225	685	710	1565	340/50	-	B	C	D	70	B
	225/55R19	99H	-	8.3	7J	233	731	775	1709	300/44	-	B	C	D	70	B
	235/35R19	91VXL	-	8.5	8 1/2J	241	647	615	1356	340/50	-	B	C	D	70	B
	235/45R19	99VXL	-	8.5	8J	236	695	775	1709	340/50	-	B	C	D	70	B
	235/50R19	103VXL	-	8.5	7 1/2J	245	719	875	1929	340/50	-	B	C	D	70	B
19'	235/55R19	105HXL	-	8.5	7 1/2J	245	741	925	2039	340/50	-	B	C	D	70	B
	245/40R19	98VXL	-	8.5	8 1/2J	248	679	750	1653	340/50	-	B	C	D	70	B
	245/45R19	102HXL	-	8.5	8J	243	703	850	1874	340/50	-	B	C	D	70	B
	245/50R19	105HXL	-	8.5	7 1/2J	253	729	925	2039	340/50	-	B	C	D	70	B
	255/35R19	96VXL	-	8.5	9J	260	661	710	1565	340/50	-	B	C	D	70	B
	255/40R19	100HXL	-	8.5	9J	260	687	800	1764	340/50	-	B	C	D	70	B
	255/45R19	104HXL	-	8.5	8 1/2J	255	713	900	1984	340/50	-	B	C	D	70	B
	235/55R20	105HXL	-	8.5	7 1/2J	245	766	925	2039	340/50	-	B	C	D	70	B
	245/35R20	95VXL	-	8.5	8 1/2J	248	680	690	1521	340/50	-	B	C	D	70	B
	245/40R20	99VXL	-	8.5	8 1/2J	248	704	775	1709	340/50	-	B	C	D	70	B
20'	245/45R20	103VXL	-	8.5	8J	243	728	875	1929	340/50	-	B	C	D	70	B
	245/50R20	105HXL	-	8.5	7 1/2J	253	754	925	2039	340/50	-	B	C	D	70	B
	255/35R20	97VXL	-	8.5	9J	260	686	730	1609	340/50	-	B	C	D	70	B
	255/40R20	101VXL	-	8.5	9J	260	712	825	1819	340/50	-	B	C	D	70	B
	255/45R20	105VXL	-	8.5	8 1/2J	255	738	925	2039	340/50	-	B	C	D	70	B

WINTER

WINTER XPRO 999




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Snow&Ice | Stability | Drainage | Braking

Performance test:



M+S

RIM SIZE	18 - 22
SERIES	35 - 55
SPEED RATING	H - V



Excellent wet handling and wet braking performance.

Progressive and responsive handling in dry conditions.

Improved handling on snow surfaces and reduce the braking distance in all winter driving condition. Improve traction, lateral force during cornering, slalom and lane change situations.

Lower fuel consumption and maximum grip both on snow and wet road condition.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sid
18'	255/55R18	109HXL	-	8.5	8J	265	737	1030	2271	340/50	-	
	265/35R18	97VXL	-	8.5	9 1/2J	271	643	730	1609	340/50	-	
19'	245/55R19	107HXL	-	8.5	7 1/2J	253	753	975	2149	340/50	-	
	255/50R19	107HXL	-	8.5	8J	265	739	975	2149	340/50	-	
	255/55R19	111HXL	-	8.5	8J	265	763	1090	2403	340/50	-	
	275/35R19	100VXL	-	8.5	9 1/2J	278	675	800	1764	340/50	-	
	275/40R19	105VXL	-	8.5	9 1/2J	278	703	925	2039	340/50	-	
	285/45R19	111HXL	-	8.5	9 1/2J	285	739	1090	2403	340/50	-	
20'	255/50R20	109HXL	-	8.5	8J	265	764	1030	2271	340/50	-	
	255/55R20	110HXL	-	8.5	8J	265	788	1060	2337	340/50	-	
	265/45R20	108HXL	-	8.5	9J	266	746	1000	2205	340/50	-	
	275/35R20	102HXL	-	8.5	9 1/2J	278	700	850	1874	340/50	-	
	275/40R20	106HXL	-	8.5	9 1/2J	278	728	950	2094	340/50	-	
	275/45R20	110HXL	-	8.5	9J	273	756	1060	2337	340/50	-	
	275/50R20	113HXL	-	8.5	8 1/2J	284	784	1150	2535	340/50	-	
	275/55R20	117SXL	-	8.5	8 1/2J	284	810	1285	2833	340/50	-	
	285/50R20	116HXL	-	8.5	9J	297	794	1250	2756	340/50	-	
	305/40R20	112HXL	-	8.5	11J	313	752	1120	2469	340/50	-	
	315/35R20	110VXl	-	8.5	11J	320	728	1060	2337	340/50	-	
21'	265/45R21	108HXL	-	8.5	9J	266	771	1000	2205	340/50	-	
	275/40R21	107HXL	-	8.5	9 1/2J	278	753	975	2149	340/50	-	
	275/45R21	110HXL	-	8.5	9J	273	781	1060	2337	340/50	-	
	275/50R21	113HXL	-	8.5	8 1/2J	284	809	1150	2535	340/50	-	
	285/40R21	109HXL	-	8.5	10J	290	761	1030	2271	340/50	-	
	295/35R21	107HXL	-	8.5	10 1/2J	301	739	975	2149	340/50	-	
	295/40R21	111HXL	-	8.5	10 1/2J	301	769	1090	2403	340/50	-	
	315/35R21	111HXL	-	8.5	11J	320	753	1090	2403	340/50	-	
	315/40R21	115HXL	-	8.5	11J	320	785	1215	2679	340/50	-	
22'	275/40R22	107HXL	-	8.5	9 1/2J	278	779	975	2149	340/50	-	


SNOWROVER 989



PCR | UHP | SUV | 4X4/LT | VAN

Snow&Ice | Stability | Drainage | Braking

Performance test:



3PMSF

M+S

RIM SIZE	14 - 16
SERIES	60 - 75
SPEED RATING	R - T



The tacit connection of the longitudinal and transverse grooves complemented by a fine and tortuous sipe design
Effective elimination of snow and better grip to greatly increase the adhesion to ice and snow, eliminate hydroplanning and improve mud & snow shedding and self-cleaning performance.

Special compound design for winter pattern
Improve the traction and grip of winter tires on snow and ice.

Combination design of shoulder blocks and special sipe
Effectively equalize the rigidity of the block to ensure excellent turning performance and handling; combined design of the block and the sipe to significantly increase the number of lateral grooves without affecting the overall rigidity of the block. More and further balanced contact area on the snow and ice road for better braking performance.

Optimized contour design and material structure distribution
Provides smooth operation and even pressure distribution.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
14'	165/70R14C	89/87R	6PR	8.2	5J	170	588	580/545	1279/1202	375/54	-	B	D	C	71	B
	175/65R14C	90/88T	6PR	8.2	5J	177	584	600/560	1323/1235	375/54	-	B	D	C	71	B
	175/70R14C	95/93T	6PR	8.2	5J	177	602	690/650	1521/1433	375/54	-	B	D	C	71	B
	175R14C	99/97R	8PR	8.5	5J	177	636	775/730	1709/1609	450/65	-	B	D	C	71	B
	185R14C	102/100R	8PR	8.5	5 1/2J	188	650	850/800	1874/1764	450/65	-	B	D	C	71	B
15'	195/70R15C	104/102R	8PR	8.8	6J	201	655	900/850	1984/1874	450/65	-	B	D	C	71	B
	205/70R15C	106/104R	8PR	8.8	6J	209	669	950/900	2094/1984	450/65	-	B	D	C	71	B
	215/65R15C	104/102R	6PR	8.8	6 1/2J	221	661	900/850	1984/1874	375/54	-	B	D	C	72	B
	215/70R15C	109/107R	8PR	8.8	6 1/2J	221	683	1030/975	2271/2149	450/65	-	B	C	C	72	B
	225/70R15C	112/110R	8PR	8.8	6 1/2J	228	697	1120/1060	2469/2337	450/65	-	B	C	C	72	B
16'	175/75R16C	98/96R	6PR	8.2	5J	177	668	750/710	1653/1565	375/54	-	B	D	C	71	B
	185/75R16C	104/102R	8PR	8.8	5J	184	684	900/850	1984/1874	475/69	-	B	D	C	71	B
	195/60R16C	99/97H	6PR	8.5	6J	201	640	775/730	1709/1609	375/54	-	B	D	C	71	B
	195/65R16C	104/102R	8PR	8.8	6J	201	660	900/850	1984/1874	475/69	-	B	D	C	71	B
	195/75R16C	107/105R	8PR	8.8	5 1/2J	196	698	975/925	2149/2039	475/69	-	B	D	C	71	B
	205/65R16C	107/105R	8PR	8.8	6J	209	672	975/925	2149/2039	475/69	-	B	D	C	71	B
	205/75R16C	110/108R	8PR	8.5	5 1/2J	203	714	1060/1000	2337/2204	475/69	-	B	D	C	71	B
	215/60R16C	103/101T	6PR	8.8	6 1/2J	221	664	875/825	1929/1819	375/54	-	B	C	C	72	B
	215/65R16C	109/107R	8PR	8.8	6 1/2J	221	686	1030/975	2271/2149	475/69	-	B	C	C	72	B
	215/75R16C	113/111R	8PR	8.8	6J	216	728	1150/1090	2535/2403	475/69	-	B	C	C	72	B
	225/65R16C	112/110R	8PR	8.8	6 1/2J	228	698	1120/1060	2469/2337	475/69	-	B	C	C	72	B
	225/75R16C	116/114R	8PR	8.8	6J	223	744	1250/1180	2756/2601	475/69	-	B	C	C	72	B
	235/65R16C	115/113R	8PR	8.8	7J	240	712	1215/1150	2679/2535	475/69	-	B	C	C	72	B

WINTER

SNOWROVER 966




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Snow&Ice | Stability | Drainage | Braking

Performance test:



M+S

RIM SIZE	13 - 17
SERIES	45 - 80
SPEED RATING	T - H



Cuneiform pattern
Cuneiform pattern design. Small angle cuneiform block inside provide great anti-slip ability and traction ability.

3D slips
Updated 3D slip design ensures the max driving grip ability when the grooves contact the ice road, and remain the rigidity of block when the grooves close. Improve the driving stability and safety.

3D shoulder
3D shoulder design enlarges the contact area and removes the snow on shoulder through ladder structure in rolling period.

Zgrooves
"Z" groove design at the outside improve snow melt ability and ice grip.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
13'	155/65R13	73T	-	8.4	4.50B	157	532	365	805	300/44	-	B	D	D	69	B
	155/80R13	79T	-	9	4.50B	157	578	437	963	300/44	-	B	D	D	69	B
	165/70R13	79T	-	9	5.00B	170	562	437	963	300/44	-	B	D	D	69	B
	175/70R13	82T	-	9	5.00B	177	576	475	1047	300/44	-	B	D	D	69	B
14'	165/60R14	75T	-	9	5J	170	554	387	853	300/44	-	B	D	D	69	B
	175/65R14	82T	-	9	5J	177	584	475	1047	300/44	-	B	D	D	69	B
	175/70R14	88T	-	8	5J	177	602	500	1102	340/44	-	B	D	D	69	B
	185/60R14	82T	-	9	5 1/2J	189	578	475	1047	300/44	-	B	D	D	69	B
	185/65R14	86T	-	9	5 1/2J	189	596	530	1168	300/44	-	B	D	D	69	B
	185/70R14	92T	-	9	5 1/2J	189	616	560	1235	340/44	-	B	C	D	69	B
	195/70R14	95T	-	8.8	6J	201	630	615	1356	340/44	-	B	C	D	69	A
15'	185/55R15	82H	-	9	6J	194	585	475	1047	300/44	-	B	D	D	69	B
	185/60R15	88H	-	9	5 1/2J	189	603	500	1102	300/44	-	B	D	D	69	B
	185/65R15	88H	-	9	5 1/2J	189	621	560	1235	300/44	-	B	D	D	69	B
	195/50R15	82H	-	9	6J	201	577	475	1047	300/44	-	B	D	D	69	A
	195/55R15	85H	-	9	6J	201	595	515	1135	300/44	-	B	D	D	69	A
	195/60R15	88H	-	8	6J	201	615	560	1235	300/44	-	B	D	D	69	A
	195/65R15	91H	-	8.8	6J	201	635	615	1356	300/44	-	B	C	D	69	A
	205/65R15	94H	-	9.5	6J	209	647	670	1477	300/44	-	B	C	D	69	A
16'	205/55R16	91H	-	7.5	6 1/2J	214	632	615	1356	300/44	-	B	C	D	69	A
	205/60R16	96H	-	9.5	6J	209	652	630	1389	340/44	-	B	C	D	69	A
	215/60R16	99H	-	9.5	6 1/2J	221	664	690	1521	340/44	-	B	C	D	69	A
	215/65R16	98H	-	9.5	6 1/2J	221	686	750	1653	300/44	-	B	C	D	69	A
	225/55R16	99H	-	9.5	7J	233	654	690	1521	300/44	-	B	C	D	69	A
	225/60R16	98H	-	9.5	6 1/2J	228	676	750	1653	300/44	-	B	C	D	69	A
	235/70R16	106T	-	9.5	7J	240	736	950	2094	300/44	-	B	C	D	69	A
17'	225/45R17	94H	-	9.5	7 1/2J	225	634	670	1477	340/50	-	B	C	D	69	A
	225/65R17	102T	-	9.5	6 1/2J	228	724	850	1874	300/44	-	B	C	D	69	A

WINTER

SNOWROVER 868




3PMSF

PCR | UHP | SUV | 4X4/LT | VAN

Snow&Ice | Stability | Drainage | Braking

Performance test:



M+S

RIM SIZE	13 - 20
SERIES	35 - 70
SPEED RATING	T - V



Steel hook design
Central hook-like blocks ensure the horizontal rigidity driving on dry and wet road conditions. The hook-like design enhances great performance on both horizontal rigidity and handling experience.

Zigzag steel sheets
Zigzag steel sheets design.
3D Densely zigzag steel sheets design increase anti-skip ability on ice road.

Zigzag grooves
Zigzag vertical grooves design reduces the snows in the grooves and builds the effect of meshing between tyre and snow. Ensure the riding safety through pressing and removing snow by rolling.

Flash ribs
Flash ribs design provide excellent handling and braking performance, increase the traction ability on ice road.

SONIX

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Load (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall			Noise	
13'	155/65R13	73T	-	7.7	4.50B	157	532	365	805	300/44	-	B	D	C	69	B
	155/70R13	75T	-	7.6	4 1/2J	157	548	387	853	300/44	-	B	D	C	69	B
	165/70R13	79T	-	7.7	5.00B	170	562	437	963	300/44	-	B	D	C	69	B
14'	155/65R14	75T	-	7.6	4 1/2J	157	558	387	853	300/44	-	B	D	C	69	B
	165/65R14	79T	-	7.6	5J	170	570	437	963	300/44	-	B	D	C	69	B
	165/70R14	85TXL	-	7.6	5J	170	588	515	1135	340/50	-	B	D	C	69	B
	175/70R14	88T	-	8	5J	177	602	560	1235	340/50	-	B	D	C	69	B
	185/60R14	82T	-	8	5 1/2J	189	578	475	1047	300/44	-	B	D	C	69	B
	185/65R14	86H	-	8	5 1/2J	189	596	530	1168	300/44	-	B	D	C	69	B
	195/60R14	86H	-	8.3	6J	201	590	530	1168	300/44	-	B	D	C	69	A
15'	175/65R15	84T	-	7.6	5J	177	609	500	1102	300/44	-	B	D	C	69	B
	185/60R15	84H	-	8	5 1/2J	189	603	500	1102	300/44	-	B	D	C	69	B
	185/65R15	88H	-	8	5 1/2J	189	621	560	1235	300/44	-	B	D	C	69	B
	195/55R15	85V	-	8.3	6J	201	595	515	1135	300/44	-	B	D	C	69	A
	195/60R15	88H	-	8.3	6J	201	615	560	1235	300/44	-	B	D	C	69	A
	195/65R15	95T	-	8.3	6J	201	635	690	1521	340/50	-	B	C	C	70	B
	205/65R15	94H	-	8.3	6J	209	647	670	1477	300/44	-	B	C	C	70	B
	215/70R15	98T	-	8	6 1/2J	221	683	750	1653	300/44	-	B	C	C	70	B
16'	195/55R16	91H XL	-	9	6J	201	620	615	1356	340/50	-	B	C	C	70	B
	195/60R16	89H	-	8	6J	201	640	580	1279	300/44	-	B	C	C	70	B
	205/55R16	91H	-	8.3	6 1/2J	214	632	615	1356	300/44	-	B	C	C	70	B
	205/55R16	94H	-	8.3	6 1/2J	214	632	670	1477	340/50	-	B	C	C	70	B
	205/60R16	96H	-	8.3	6J	209	652	710	1565	340/50	-	B	C	C	70	B
	215/55R16	97H XL	-	8	7J	226	642	730	1609	340/50	-	B	C	C	70	B
	215/60R16	99H	-	8.3	6 1/2J	221	664	775	1709	340/50	-	B	C	C	70	B
	215/70R16	100T	-	8	6 1/2J	221	708	800	1764	300/44	-	B	C	C	70	B
	225/70R16	107TXL	-	8	6 1/2J	228	722	975	2149	340/50	-	B	C	C	70	B
	235/60R16	100H	-	8.5	7J	240	688	800	1764	300/44	-	B	C	C	70	B
	245/70R16	111TXL	-	8	7J	248	750	1090	2403	340/50	-	B	C	C	71	B
	265/70R16	112T	-	8	8J	272	778	1120	2469	300/44	-	B	C	C	72	B
17'	205/50R17	93H XL	-	8	6 1/2J	214	638	650	1433	340/50	-	B	C	C	70	B
	215/50R17	95H XL	-	8	7J	226	648	690	1521	340/50	-	B	C	C	70	B
	215/55R17	98V	-	8.3	7 J	226	668	750	1653	340/50	-	B	C	C	70	B
	215/60R17	96H	-	8.5	6 1/2J	221	690	710	1565	300/44	-	B	C	C	70	B
	225/50R17	98H XL	-	8	7J	233	658	750	1653	340/50	-	B	C	C	70	B
	225/55R17	101V	-	8.3	7J	233	680	825	1819	340/50	-	B	C	C	70	B
	225/60R17	99H	-	8.5	6 1/2J	228	702	775	1709	300/44	-	B	C	C	70	B
	235/45R17	97H XL	-	8	8J	236	644	730	1609	340/50	-	B	C	C	71	B
	235/55R17	103H XL	-	8	7 1/2J	245	690	875	1929	340/50	-	B	C	C	71	B
	235/60R17	102H	-	8.5	7 J	240	714	850	1873	300/44	-	B	C	C	71	B
	235/65R17	108T XL	-	8	7J	240	738	1000	2205	340/50	-	B	C	C	71	B
	245/65R17	107S	-	8.5	7 J	248	750	975	2149	300/44	-	B	C	C	71	B
	255/60R17	110TXL	-	8.5	7 1/2J	260	738	1060	2337	340/50	-	B	C	C	72	B
	265/65R17	112T	-	8	8J	272	776	1120	2469	300/44	-	B	C	C	72	B
	265/70R17	115T	-	8	8J	272	804	1215	2679	300/44	-	B	C	C	72	B
18'	225/40R18	92H XL	-	8	8J	230	637	630	1389	340/50	-	B	C	C	70	B
	225/45R18	95H XL	-	8	7 1/2J	225	659	690	1521	340/50	-	B	C	C	70	B
	235/45R18	98H XL	-	8	8J	236	669	750	1653	340/50	-	B	C	C	71	B
	225/60R18	104HXL	-	8.5	6 1/2J	228	727	900	1984	340/50	-	B	C	C	71	B
	235/60R18	107H XL	-	8	7J	240	739	975	2149	340/50	-	B	C	C	71	B
	245/40R18	97VXL	-	8	8 1/2J	248	653	730	1609	340/50	-	B	C	C	71	B
	245/45R18	100H XL	-	8	8J	243	677	800	1764	340/50	-	B	C	C	71	B
	245/60R18	105H	-	8.5	7J	248	751	925	2039	300/44	-	B	C	C	71	B
	255/55R18	109H XL	-	8	8J	265	737	1030	2271	340/50	-	B	C	C	72	B
	255/60R18	112TXL	-	8.5	7 1/2J	260	763	1120	2469	340/50	-	B	C	C	72	B
	265/60R18	110T	-	8.5	8J	272	775	1060	2337	300/44	-	B	C	C	72	B
	265/70R18	116S	-	8.5	8J	272	829	1250	2756	300/44	-	B	C	C	72	B
	285/60R18	116H	-	8	8 1/2J	292	799	1250	2756	300/44	-	B	C	C	73	B
19'	235/55R19	105HXL	-	8	7 1/2J	245	741	925	2039	340/50	-	B	C	C	71	B
	245/45R19	102HXL	-	8	8J	243	703	850	1874	340/50	-	B	C	C	71	B
	245/55R19	107HXL	-	8	7 1/2J	253	753	975	2149	340/50	-	B	C	C	71	B
	255/50R19	107HXL	-	8	8J	265	739	975	2149	340/50	-	B	C	C	72	B
	255/55R19	111HXL	-	8	8J	265	763	1090	2403	340/50	-	B	C	C	72	B
20'	255/45R20	105VXL	-	8	8 1/2J	255	738	925	2039	340/50	-	B	C	C	72	B
	275/40R20	106HXL	-	8	9 1/2J	278	728	950	2094	340/50	-	B	C	C	72	B
	275/45R20	110H XL	-	8	9J	273	756	1060	2337	340/50	-	B	C	C	72	B
	275/60R20	119HXL	-	8.5	8J	279	838	1360	2998	340/50	-	B	C	C	72	B
	315/35R20	110VXL	-	8.5	11J	320	728	1060	2337	340/50	-	B	C	C	74	B

CERTIFICATES



1 ISO14001



2 BIS



3 CCC



4 ECE



5 SASO



6 GCC



7 SGS



8 SONCAP

EXHIBITIONS









Tyre Sidewall descriptions



Speed

Speed symbol indicates the maximum travel speed That the tire can achieve understated condition.

SS	Maximum Speed (km/h)
L	120
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
★ZR	over 240km/h

★ZR means ace tain range of speed

Maximum speed refers to the speed that the tirecan achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire's maxi num load ability understated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						